

PVC/Nylon/PVC, 600V Instrumentation Type TC-ER, Pairs


Part #: E1BED-161B06PJ00

DESCRIPTION

The PVC/Nylon/PVC, 600V Instrumentation Type TC-ER Cables consist of fully annealed bare copper Class B stranded conductors (in pairs or triads), covered with Polyvinyl Chloride (PVC) and clear Nylon insulation, overall and/or individually shielded and black PVC jacket. These cables are used control systems, audio, intercom, alarm circuits and energy management.

APPLICATION

- In free air, ducts, cable trays, conduit, raceways and direct burial.
- Approved for direct burial, Class I Div. 2 industrial hazardous locations per NEC.
- Used as a non-power-limited fire alarm circuit cable (NPLF) per NEC Article 760
- Permitted for Exposed Run (ER) used in accordance with NEC for 3 or more conductors; two conductors without a ground wire are Type TC only.

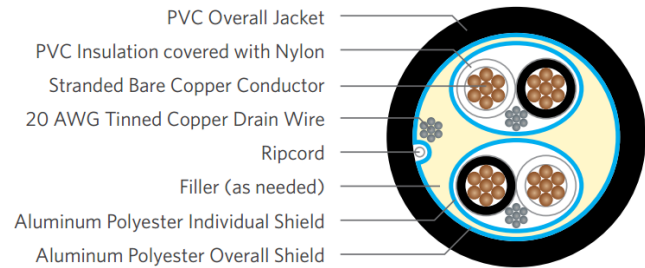

SPECIFICATIONS

Conductor	Bare Copper, Class B strand	Packaging	Non-returnable reels
Insulation	PVC/Nylon	Performance	ASTM B8
Shield	Individually (IS) and Overall (OS) Shield Alum-polyester in contact with drain wire	Compliance	ASTM B33 UL 1277 UL83 ICEA S-73-532 CSA FT4/IEEE1202 NEC
Jacket	PVC	Other Compliances	EPA 40 CFR, Part 261 OSHA RoHS/RoHS-2-compliant REACH-compliant

PART NUMBER AND PHYSICAL CHARACTERISTICS

Part Number	Pair Count	Conductor Size AWG	Insulation Thickness (in.)	Jacket Thickness (in.)	OD (in.)	Net Weight (lbs./MFT)
E1BED-161B06PJ00	06	16	0.020	0.060	0.669	235

The dimensions and weights shown are nominal and subject to industry standards. Other designs available upon request.