


## EPR/CTS/PVC, Type MV-105, 5kV 133%, 115-MILS Single Conductor Filled Copper -Silicone Free

### DESCRIPTION

This specification covers cables that consist of Copper filled conductor, covered with ethylene propylene rubber (EPR), copper taped shield (CTS) and a polyvinyl chloride (PVC) jacket.

### APPLICATIONS

- Primary installations include cable trays, outdoor locations, in conduit, duct, free air and raceways.
- Direct buried if installed in a system with a ground conductor that is in close proximity and conforms to NEC 250.4(A)(5)
- In wet or dry locations.
- Approved for Class I, Div. 2 industrial hazardous locations per NEC
- For CT use for 1/0 AWG and larger
- Designed to operate continuously at a conductor temperature not exceeding
  - 105°C for normal operations
  - 140°C for emergency overload
  - 250°C for short circuit

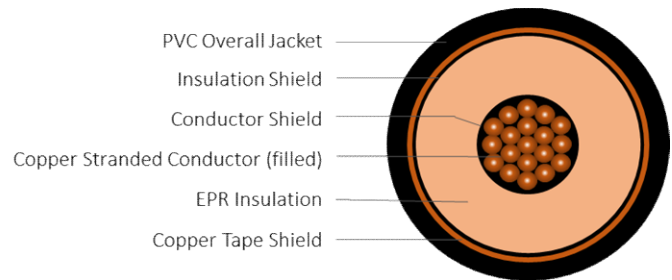

CONSTRUCTION	
<b>CONDUCTOR</b>	Annealed bare copper (filled) Class B Strand Compressed
<b>STRAND SHIELD</b>	Thermoset semi-conducting polymer
<b>INSULATION</b>	Ethylene propylene rubber (EPR)
<b>INSULATION SHIELD</b>	Thermoset semi-conducting polymer
<b>SHIELD</b>	5-mil copper tape with a 25% overlap
<b>JACKET</b>	Polyvinyl Chloride (PVC)
<b>PACKAGING</b>	Non-returnable wooden reels

STANDARDS (Compliance)	
<b>PERFORMANCE</b>	AEIC CS8
	ASTM B-3
	ASTM B-8
	ICEA S-97-682
	ICEA S-93-639
	UL 1072

### SPECIFICATIONS

Part Number	Conductor Size	Conductor Diameter (in)	Insulation Diameter (in)	Metallic Shield	Jacket Thickness (in)	Approx. Overall Diameter (in)	Approx. Net Weight (lbs/kft)
E8FLE-A15B01CA00	250 kcmil	0.558	0.83	CTS with 25% overlap	0.075	1.07	1,176

\*The dimensions and weights shown are nominal and subject to industry standards. Other designs available upon request.