

EPR/CTS/PVC Power, Type MV-105, 15kV (133%); 220-mils


Series E8JLE-2A1T01CA00

DESCRIPTION

The Medium Voltage, EPR/Cu Tape Shield/PVC, Type MV-105 Cable consist of full annealed bare copper Class B compact stranded conductors, covered with ethylene rubber (EPR), copper tape shield, and black PVC jacket. These cables are used in industrial power circuits.

APPLICATION

- In conduit, duct, free air, raceways and direct burial, primary installations include cable trays, and outdoor locations.
- Direct burial
- In wet or dry locations
- Designed to operate continuously at a conductor temperature not exceeding
 - » 105°C for normal operations
 - » 140°C for emergency overload
 - » 250°C for short circuit

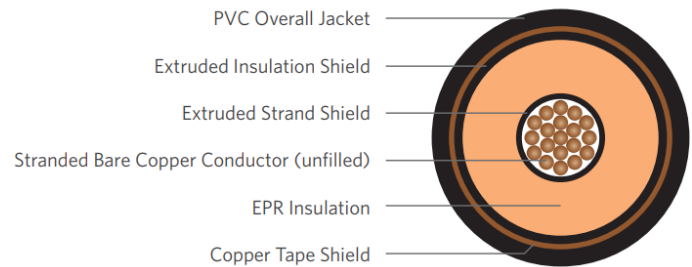

SPECIFICATIONS

Conductor	Bare Copper, Class B compact strand	Packaging	Non-returnable reels
Insulation	EPR	Performance	ASTM B8 ASTM B496
Shield	Copper tape shield with 25% Overlap	Compliance	UL 1072 ICEA S-93-639 ICEA S-97-682 AEIC CS8 NEC
Jacket	PVC	Other Compliances	EPA 40 CFR, Part 261 OSHA

1C 2/0 AWG 19-wires Cu CMPCT 15kV 133% 220mils EPR Cu Tape Shield PVC, MV-105

PART NUMBER AND PHYSICAL CHARACTERISTICS						
Part Number	Conductor Size (AWG/kcmil)	Conductor Diameter (in.)	Insulation Diameter (in.)	Jacket Thickness (in.)	Overall Diameter (in.)	Net Weight (lbs./MFT)
E8JLE-2A1T01CA00	2/0 cu	.376	.852	.080	1.09	896

The dimensions and weights shown are nominal and subject to industry standards and manufacturing tolerances. Other designs available upon request