


**EPR/CTS/PVC, Type MV-105, 35kV 100%, 345-MILS  
Single Conductor Un-Filled Aluminum 8000 -Silicone Free**

**DESCRIPTION**

This specification covers cables that consist of Aluminum 8000 un-filled conductor, covered with ethylene propylene rubber (EPR), copper taped shield (CTS) and a polyvinyl chloride (PVC) jacket.

**APPLICATIONS**

- Suitable for underground primary power applications: direct burial or in duct.
- For wet or dry locations
- Jacket is sunlight resistant, meeting the 720-hr exposure test
- Excellent resistance to treeing
- Designed to operate continuously at a conductor temperature not exceeding
  - 105°C for normal operations
  - 140°C for emergency overload
  - 250°C for short circuit

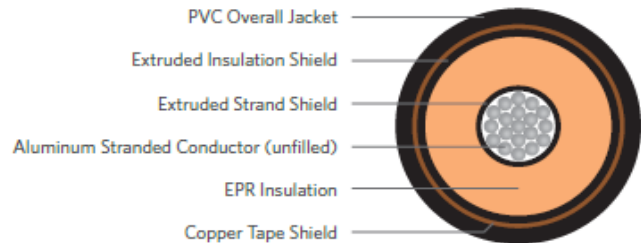

CONSTRUCTION		STANDARDS (Compliance)	
<b>CONDUCTOR</b>	Aluminum 8000 Class B Strand Compressed	<b>PERFORMANCE</b>	AEIC CS8 ASTM B-800 ASTM B-801 ICEA S-97-682 ICEA S-93-639 UL 1072
<b>STRAND SHIELD</b>	Thermoset semi-conducting polymer		
<b>INSULATION</b>	Ethylene propylene rubber (EPR)		
<b>INSULATION SHIELD</b>	Thermoset semi-conducting polymer		
<b>SHIELD</b>	5-mil copper tape with a 25% overlap		
<b>JACKET</b>	Polyvinyl Chloride (PVC)		
<b>PACKAGING</b>	Non-returnable wooden reels		

SPECIFICATIONS							
Part Number	Conductor Size	Conductor Diameter (in)	Insulation Diameter (in)	Metallic Shield	Jacket Thickness (in)	Approx. Overall Diameter (in)	Approx. Net Weight (lbs/kft)
E8MLE-1A4G01CA00	1/0 AWG	0.362	1.08	CTS with 25% overlap	0.075	1.32	847

\*The dimensions and weights shown are nominal and subject to industry standards. Other designs available upon request.