


**EPR/CTS/PVC, Type MV-105, 35kV 100%, 345-MILS
Single Conductor Un-Filled Aluminum 8000 -Silicone Free**

DESCRIPTION

This specification covers cables that consist of Aluminum 8000 un-filled conductor, covered with ethylene propylene rubber (EPR), copper taped shield (CTS) and a polyvinyl chloride (PVC) jacket.

APPLICATIONS

- Suitable for underground primary power applications: direct burial or in duct.
- For wet or dry locations
- Jacket is sunlight resistant, meeting the 720-hr exposure test
- Excellent resistance to treeing
- Designed to operate continuously at a conductor temperature not exceeding
 - 105°C for normal operations
 - 140°C for emergency overload
 - 250°C for short circuit

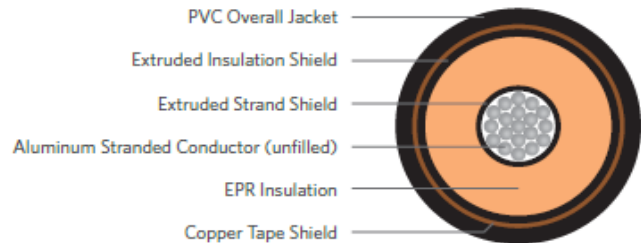

CONSTRUCTION		STANDARDS (Compliance)	
CONDUCTOR	Aluminum 8000 Class B Strand Compressed	PERFORMANCE	AEIC CS8 ASTM B-800 ASTM B-801 ICEA S-97-682 ICEA S-93-639 UL 1072
STRAND SHIELD	Thermoset semi-conducting polymer		
INSULATION	Ethylene propylene rubber (EPR)		
INSULATION SHIELD	Thermoset semi-conducting polymer		
SHIELD	5-mil copper tape with a 25% overlap		
JACKET	Polyvinyl Chloride (PVC)		
PACKAGING	Non-returnable wooden reels		

SPECIFICATIONS							
Part Number	Conductor Size	Conductor Diameter (in)	Insulation Diameter (in)	Metallic Shield	Jacket Thickness (in)	Approx. Overall Diameter (in)	Approx. Net Weight (lbs/kft)
E8MLE-B24G01CA00	750 kcmil	0.968	1.69	CTS with 25% overlap	0.105	1.99	2,095

**The dimensions and weights shown are nominal and subject to industry standards. Other designs available upon request.*