

## EPR/CTS/PVC Power, Type MV-105, 35kV (133%) 420-mils

### 1C 600kcmil 61-wires Al 8000 CMPCT 35kV (133%) 420-MILS EPR Cu Tape Shield PVC


Part Number: E8NLE-A84E01CA00

#### DESCRIPTION

The Medium Voltage, EPR/Cu Tape Shield/PVC, Type MV-105 Cable consists of compact 8000 Al stranded conductors, covered with ethylene propylene rubber (EPR), copper tape shield, and black PVC jacket. These cables are used in industrial power circuits.

#### APPLICATION

- In conduit, duct, free air, and raceways, primary installations include cable trays, and outdoor locations
- • Approved for Class I, Div. 2 industrial hazardous locations per NEC
- Designed to operate continuously at a conductor temperature not exceeding
  - » 105°C for normal operations
  - » 140°C for emergency overload
  - » 250°C for short circuit

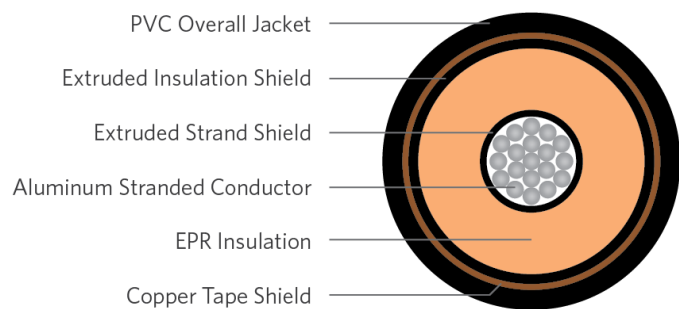

#### SPECIFICATIONS

<b>Conductor</b>	Aluminum 8000 Compact Class B strand
<b>Insulation</b>	EPR
<b>Conductor Strand Shield</b>	Extruded thermoset semi-conducting
<b>Copper Tape Shield</b>	5-mil with 25% overlap
<b>Jacket</b>	PVC

<b>Packaging</b>	Non-returnable reels
<b>Performance</b>	ASTM B-836
	UL 1072
	ICEA S-93-639
	ICEA S-97-682
<b>Other Compliances</b>	AEIC CS8
	UL 1685 Vertical Flame Test
	NEC
<b>Other Compliances</b>	EPA 40 CFR, Part 261
	OSHA

#### PART NUMBER AND PHYSICAL CHARACTERISTICS

Part Number	Conductor Size (AWG/kcmil)	Conductor Diameter (in.)	Insulation Diameter (in.)	Jacket Thickness (in.)	Overall Diameter (in.)	Net Weight (lbs./MFT)
E8NLE-A84E01CA00	600	0.866	1.73	0.110	2.03	2,066

The dimensions and weights shown are nominal and subject to industry standards and manufacturing tolerances. Other designs available upon request.

#### ELECTRICAL AND ENGINEERING DATA

Conductor Size (AWG/kcmil)	DC @ 25°C Ω/MFT	AC @ 90°C Ω/MFT	Xc @ 60Hz MΩ*MFT	Xl @ 60Hz Ω/MFT	Positive Sequence Impedance Ω/MFT	Zero Sequence Impedance Ω/MFT	Current 6 Cycles Amps
600	0.0283	0.0390	0.041	0.042	0.039 +j0.042	0.247 +j0.187	6,066