


## TR-XLPE/CN/XLPE, Type MV-105, Primary UD, 15kV 100%, 175-MILS Single Conductor Filled Aluminum -Silicone Free

### DESCRIPTION

This specification covers cables that consist of Aluminum filled conductor, covered with tree-retardant cross-linked polyethylene (TR-XLPE), a concentric neutral of helically applied copper wires, and a cross-linked polyethylene (XLPE) jacket.

### APPLICATIONS

- Suitable for underground primary power applications: direct burial or in duct.
- For wet or dry locations
- Jacket is sunlight resistant, meeting the 720-hr exposure test
- Excellent resistance to treeing
- Designed to operate continuously at a conductor temperature not exceeding
  - 105°C for normal operations
  - 140°C for emergency overload
  - 250°C for short circuit

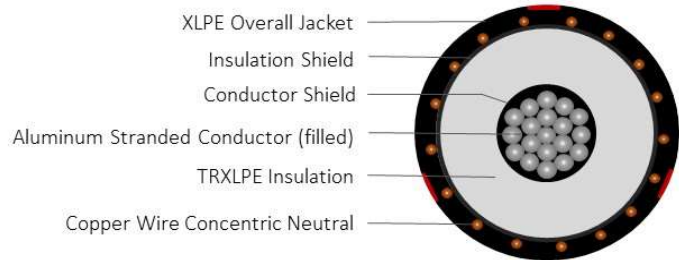

CONSTRUCTION	
<b>CONDUCTOR</b>	1350 Aluminum (filled) Class B Strand Compressed
<b>STRAND SHIELD</b>	Thermoset semi-conducting polymer
<b>INSULATION</b>	Tree-retardant cross-linked polyethylene (TR-XLPE)
<b>INSULATION SHIELD</b>	Thermoset semi-conducting polymer
<b>SHIELD</b>	Helically applied, annealed, solid bare copper wires
<b>JACKET</b>	Cross-linked Polyethylene (XLPE)
<b>PACKAGING</b>	Non-returnable wooden reels

STANDARDS (Compliance)	
<b>PERFORMANCE</b>	AEIC CS8 ASTM B-3 ASTM B-230 ASTM B-231 ICEA S-94-649 ICEA-T-31-610 UL 1072

### SPECIFICATIONS

Part Number	Conductor Size	Conductor Diameter (in)	Insulation Diameter (in)	Metallic Shield	Jacket Thickness (in)	Approx. Overall Diameter (in)	Approx. Net Weight (lbs/kft)
E9HWT-1A6F01CA00	1/0 AWG	0.362	0.74	6 x 14 AWG (1/3N)	0.055	1.06	495
E9HWT-2A6F01CA00	2/0 AWG	0.405	0.78	6 x 14 AWG (1/3N)	0.055	1.10	540
E9HWT-4A6F01CA00	4/0 AWG	0.512	0.89	8 x 14 AWG (1/3N)	0.055	1.21	684
E9HWT-A36F01CA00	350 kcmil	0.661	1.04	13 x 14 AWG (1/3N)	0.055	1.38	967
E9HWT-A66F01CA00	500 kcmil	0.789	1.17	19 x 14 AWG (1/3N)	0.055	1.51	1,237
E9HWT-B26F01CA00	750 kcmil	0.968	1.35	26 x 14 AWG (1/3N)	0.080	1.77	1,768

\*The dimensions and weights shown are nominal and subject to industry standards. Other designs available upon request.