

TR-XLPE/CN/LLDPE, Type Primary UD


Part Number: E9JKM-1A3S01CA00

DESCRIPTION

The Medium Voltage Primary Underground Distribution (UD) cables consist of an Aluminum solid conductor, covered with Tree Retardant Cross-Linked (TR-XLPE), a concentric neutral of helically applied copper wires, and a linear low-density polyethylene (LLDPE) jacket with 3 extruded red stripes.

APPLICATION

- Suitable for underground primary power applications
- For wet or dry locations
- For direct burial or in duct
- Excellent resistance to treeing
- Jacket is sunlight-resistance
- Designed to operate
 - » 90°C for normal operations
 - » 130°C for emergency overload
 - » 250°C for short circuit

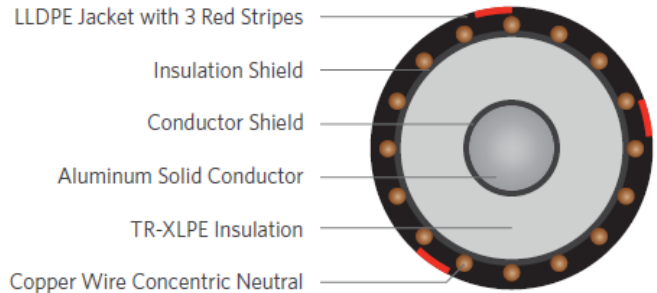

SPECIFICATIONS

Conductor	Aluminum 1350 Solid
Conductor	Extruded thermoset
Strand Shield	Semi-conducting polymer
Insulation	Cross-Linked Polyethylene (TR-XLPE)
Neutral	Solid copper wires
Jacket	Linear Low-Density Polyethylene

Packaging	Non-returnable reels
	ASTM B-3
	ASTM B-230
	ASTM B-609
Performance	ICEA S-94-649
Compliance	AEIC CS8
	UL 1072 (MV-90)
	RUS U1

1C 1/0AWG Solid Aluminum, 15kV 133% 220mils TR-XLPE, (16-wires copper x 14AWG) full concentric neutral, LLDPE jacket

PART NUMBER AND PHYSICAL CHARACTERISTICS

Part Number	Conductor Size (AWG/kcmil)	Conductor Diameter (in.)	Insulation Diameter (in.)	Copper Concentric Neutral	Jacket Thickness (in.)	OD (in.)	Net Weight (lbs./MFT)
E9JKM-1A3S01CA00	1/0	0.325	0.813	16 x 14AWG (FCN)	0.055	1.123	675

The dimensions and weights shown are nominal and subject to industry standards. Other designs available upon request.