


TRXLPE/CN/LLDPE, Type MV-90, Primary UD, 15kV 133%, 220-mils Single Conductor (filled) 1000 Kcm Aluminum, 1/3 RCN

DESCRIPTION

Medium Voltage Primary Underground Distribution (UD) cables consist of an Aluminum (filled) conductor, covered with tree-retardant cross-linked polyethylene (TRXLPE), a concentric neutral of helically applied copper wires, and a linear low-density polyethylene (LLDPE) jacket with 3 extruded red stripes.

APPLICATIONS

- Suitable for underground primary power applications: direct burial or in duct.
- For wet or dry locations
- Jacket is sunlight resistant
- Excellent resistance to treeing
- Designed to operate continuously at a conductor temperature not exceeding
 - » 90°C for normal operations
 - » 130°C for emergency overload
 - » 250°C for short circuit

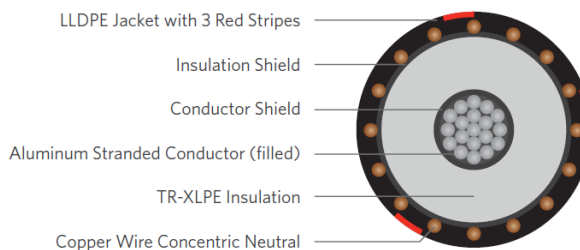

SERIES E9JKT

CONSTRUCTION

CONDUCTOR	1350 AL, Class B Strand (filled)
STRAND SHIELD	Thermoset semi-conducting polymer
INSULATION	Tree-retardant cross-linked Polyethylene (TRXLPE)
INSULATION SHIELD	Thermoset semi-conducting polymer
SHIELD	Helically applied, annealed solid bare copper wires
JACKET	Linear Low Density Polyethylene (LLDPE), moisture blocking powder applied, three red Stripes
PACKAGING	Wooden reels

STANDARDS (Compliance)

PERFORMANCE	AEIC CS8 ASTM B3 ASTM B231 ICEA S-94-649 ICEA T-34-644 UL 1072 (MV-90) RUS U1
--------------------	---

SPECIFICATIONS

Part Number	Conductor Size (Kcmil)	Conductor Diameter (in)	Nominal Insulation Diameter (in)	Copper Concentric Neutrals	Nominal Jacket Thickness (in)	Approximate O.D. (in)	Approximate Net Weight (lbs / Kft)
E9JKT-B56F01CA20	1000	1.117	1.59	31 x #12	0.080	2.01	2,440

The dimensions and weights shown are nominal and subject to industry standards. Other designs available upon request.