


EPR/CN/LLDPE, Type MV-90, Primary UD, 15kV 133%, 220-mils Single Conductor Filled Copper - Silicone Free

DESCRIPTION

This specification covers cables that consist of Copper filled conductor, covered with ethylene propylene rubber (EPR), a concentric neutral of helically applied copper wires, and a moisture blocked linear low density polyethylene (LLDPE) jacket with 3 extruded red stripes.

APPLICATIONS

- Suitable for underground primary power applications: direct burial or In duct.
- For wet or dry locations
- Jacket is sunlight resistant, meeting the 720-hr exposure test
- Excellent resistance to treeing
- Designed to operate continuously at a conductor temperature not exceeding
 - » 90°C for normal operations
 - » 130°C for emergency overload
 - » 250°C for short circuit

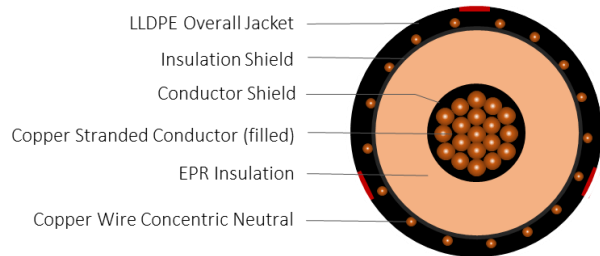

CONSTRUCTION

CONDUCTOR	Annealed bare Copper (filled) Class B Strand Compressed
STRAND SHIELD	Thermoset semi-conducting polymer
INSULATION	Ethylene propylene rubber (EPR)
INSULATION SHIELD	Thermoset semi-conducting polymer
SHIELD	Helically applied, annealed solid bare copper wires
JACKET	Moisture blocked Linear low-density polyethylene (LLDPE)
PACKAGING	Non-returnable reels

STANDARDS (Compliance)

PERFORMANCE	AEIC CS8 ASTM B-3 ASTM B-8 ICEA S-94-649 ICEA T-34-664 UL 1072
--------------------	---

SPECIFICATIONS

Part Number	Conductor Size (AWG)	Conductor Diameter (in)	Insulation Diameter (in)	Copper Concentric Neutrals	Jacket Thickness (in)	Overall Diameter (in)	Net Weight (lbs/kft)
E9JPG-4A5B01CA20	4/0	0.512	0.98	20 x 10 AWG (customer)	0.055	1.37	1,825

The dimensions and weights shown are nominal and subject to industry standards. Other designs available upon request.