


**EPR/CN/LLDPE, Type MV-90, Primary UD, 15kV 133%, 220-MILS  
Single Conductor Filled Copper -Silicone Free**

**DESCRIPTION**

This specification covers cables that consist of Copper filled conductor, covered with ethylene propylene rubber (EPR), a concentric neutral of helically applied copper wires, and a moisture blocked linear low density polyethylene (LLDPE) jacket with 3 extruded red stripes.

**APPLICATIONS**

- Suitable for underground primary power applications: direct burial or in duct.
- For wet or dry locations
- Jacket is sunlight resistant, meeting the 720-hr exposure test
- Excellent resistance to treeing
- Designed to operate continuously at a conductor temperature not exceeding
  - 105°C for normal operations
  - 140°C for emergency overload
  - 250°C for short circuit

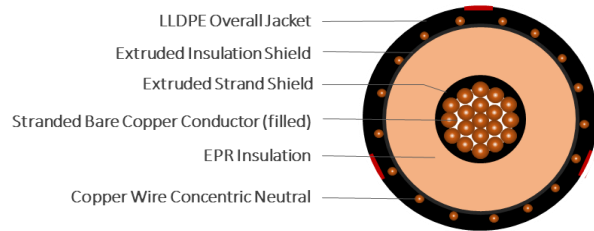

CONSTRUCTION		STANDARDS (Compliance)	
<b>CONDUCTOR</b>	Annealed bare copper (filled) Class B Strand Compressed	<b>PERFORMANCE</b>	AEIC CS8 ASTM B-3 ASTM B-8 ICEA S-94-649 ICEA-T-34-664 ICEA-T-31-610 UL 1072
<b>STRAND SHIELD</b>	Thermoset semi-conducting polymer		
<b>INSULATION</b>	Ethylene propylene rubber (EPR)		
<b>INSULATION SHIELD</b>	Thermoset semi-conducting polymer		
<b>SHIELD</b>	Helically applied, annealed, solid bare copper wires		
<b>JACKET</b>	Moisture blocked Linear low-density polyethylene (LLDPE)		
<b>PACKAGING</b>	Non-returnable wooden reels		

SPECIFICATIONS							
Part Number	Conductor Size	Conductor Diameter (in)	Insulation Diameter (in)	Metallic Shield	Jacket Thickness (in)	Approx. Overall Diameter (in)	Approx. Net Weight (lbs/kft)
E9JPT-4A5B01CA20	4/0 AWG	0.512	0.98	18 x 14 AWG (1/3N)	0.055	1.30	1,371
E9JPM-025B01CA20	2 AWG	0.283	0.75	16 x 14 AWG (FCN)	0.055	1.07	778
E9JPM-1A5B01CA21	1/0 AWG	0.362	0.83	16 x 12 AWG (FCN)	0.055	1.18	1,078

*\*The dimensions and weights shown are nominal and subject to industry standards. Other designs available upon request.*