

EPR/CN/LLDPE, Type Primary UD


Part Number: E9JPT-4A1T01CA00

DESCRIPTION

The Medium Voltage Primary Underground Distribution (UD) cables consist of a copper stranded unfilled conductor, covered with Ethylene Propylene Rubber (EPR), a concentric neutral of helically applied copper wires, and a linear low-density polyethylene (LLDPE) jacket with 3 extruded red stripes.

APPLICATION

- Suitable for underground primary power applications
- For wet or dry locations
- For direct burial or in duct
- Excellent resistance to treeing
- Jacket is sunlight-resistance
- Designed to operate
 - » 105°C for normal operations
 - » 140°C for emergency overload
 - » 250°C for short circuit

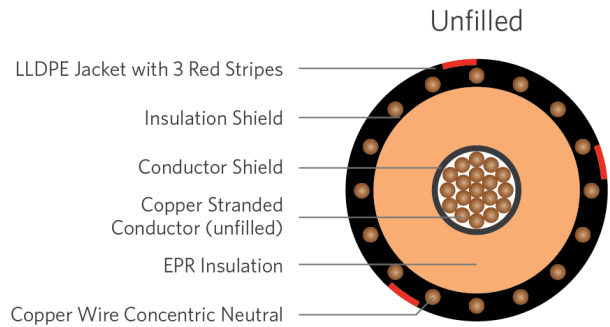

SPECIFICATIONS

Conductor	Bare copper class B strand Compact (unfilled)	Packaging	Non-returnable reels
Conductor Strand Shield	Extruded thermoset Semi-conducting polymer	Compliance	ASTM B-3 ASTM B-496 ICEA S-94-649 AEIC CS8 UL 1072 (MV-90) RUS U1
Insulation	Ethylene Propylene Rubber (EPR)		
Neutral	Solid copper wires		
Jacket	Linear Low-Density Polyethylene		

1C 4/0AWG 19-wires Copper compact (unfilled), 15kV 133% 220mils EPR, (18-wires copper x 14AWG) 1/3 concentric neutral, LLDPE jacket

PART NUMBER AND PHYSICAL CHARACTERISTICS							
Part Number	Conductor Size (AWG/kcmil)	Conductor Diameter (in.)	Insulation Diameter (in.)	Copper Concentric Neutral	Jacket Thickness (in.)	Overall Diameter (in.)	Net Weight lbs./MFT
E9JPT-A61T01CA00	4/0	0.475	0.95	18 x 14AWG	0.055	1.27	1,355

The dimensions and weights shown are nominal and subject to industry standards.