

EPR/CN/LLDPE, Type Primary UD (Copper Compact Filled)

15kV 133% 220mils


Part Number: E9JPT-A65T01CA00

DESCRIPTION

The Medium Voltage Primary Underground Distribution (UD) cables consist of a copper compact stranded filled conductor, covered with Ethylene Propylene Rubber (EPR), a concentric neutral of helically applied copper wires, and a linear low-density polyethylene (LLDPE) jacket with 3 extruded red stripes.

APPLICATION

- Suitable for underground primary power applications
- For wet or dry locations
- For direct burial or in duct
- Excellent resistance to treeing
- Jacket is sunlight-resistance
- Designed to operate
 - » 105°C for normal operations
 - » 140°C for emergency overload
 - » 250°C for short circuit

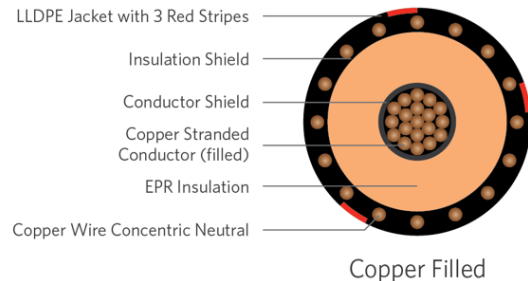

SPECIFICATIONS

Conductor	Bare copper class B strand Compact (filled)
Conductor Strand Shield	Extruded thermoset Semi-conducting polymer
Insulation	Ethylene Propylene Rubber (EPR)
Neutral	Solid copper wires
Jacket	Linear Low-Density Polyethylene

Packaging	Non-returnable reels
Performance	ASTM B-3 ASTM B-496 ICEA S-94-649
Compliance	AEIC CS8 UL 1072 (MV-90) RUS U1

1C 500kcmil 37-wires Copper Compact (filled), 15kV 133% 220mils EPR, (26-wires copper x 14 AWG) 1/3 reduced concentric neutral, LLDPE jacket

PART NUMBER AND PHYSICAL CHARACTERISTICS							
Part Number	Conductor Size (AWG/kcmil)	Conductor Diameter (in.)	Insulation Thickness (in.)	Copper Concentric Neutral	Jacket Thickness (in.)	OD (in.)	Net Weight (lbs./MFT)
E9JPT-A65T01CA00	500	0.736	0.220	26 X 14AWG	0.050	1.570	2,721

The dimensions and weights shown are nominal and subject to industry standards.