


TR-XLPE/CN/XLPE, Type MV-105, Primary UD, 15kV 133%, 220-MILS Single Conductor Un-Filled Aluminum -Silicone Free

DESCRIPTION

This specification covers cables that consist of Aluminum un-filled conductor, covered with tree-retardant cross-linked polyethylene (TR-XLPE), a concentric neutral of helically applied copper wires, and a cross-linked polyethylene (XLPE) jacket.

APPLICATIONS

- Suitable for underground primary power applications: direct burial or in duct.
- For wet or dry locations
- Jacket is sunlight resistant, meeting the 720-hr exposure test
- Excellent resistance to treeing
- Designed to operate continuously at a conductor temperature not exceeding
 - 105°C for normal operations
 - 140°C for emergency overload
 - 250°C for short circuit

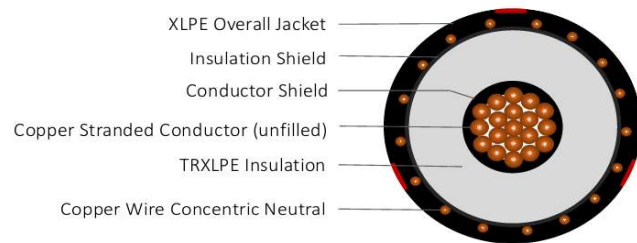

CONSTRUCTION		STANDARDS (Compliance)	
CONDUCTOR	1350 Aluminum (unfilled) Class B Strand Compressed	PERFORMANCE	AEIC CS8 ASTM B-3 ASTM B-230 ASTM B-231 ICEA S-94-649 UL 1072
STRAND SHIELD	Thermoset semi-conducting polymer		
INSULATION	Tree-retardant cross-linked polyethylene (TR-XLPE)		
INSULATION SHIELD	Thermoset semi-conducting polymer		
SHIELD	Helically applied, annealed, solid bare copper wires		
JACKET	Cross-linked Polyethylene (XLPE)		
PACKAGING	Non-returnable wooden reels		

SPECIFICATIONS							
Part Number	Conductor Size	Conductor Diameter (in)	Insulation Diameter (in)	Metallic Shield	Jacket Thickness (in)	Approx. Overall Diameter (in)	Approx. Net Weight (lbs/kft)
E9JWT-1A3F01CA00	1/0 AWG	0.362	0.83	6 x 14 AWG (1/3N)	0.055	1.15	559
E9JWT-3A3F01CA00	3/0 AWG	0.456	0.92	7 x 14 AWG (1/3N)	0.055	1.24	675
E9JWT-4A3F01CA00	4/0 AWG	0.512	0.98	8 x 14 AWG (1/3N)	0.055	1.30	756

*The dimensions and weights shown are nominal and subject to industry standards. Other designs available upon request.

