


## TR-XLPE/CN/XLPE, Type MV-105, Primary UD, 15kV 133%, 220mils Single Conductor Filled Aluminum - Silicone Free

### DESCRIPTION

This specification covers cables that consist of aluminum filled conductor, covered with tree-retardant cross-linked polyethylene (TR-XLPE), a concentric neutral of helically applied copper wires, and a moisture blocked cross-linked polyethylene (XLPE) jacket with 3 extruded red stripes.

### APPLICATIONS

- Suitable for underground primary power applications: direct burial or in duct.
- For wet or dry locations.
- Jacket is sunlight resistant.
- Excellent resistance to treeing
- Designed to operate continuously at a conductor temperature not exceeding
  - » 105°C for normal operations
  - » 140°C for emergency overload
  - » 250°C for short circuit

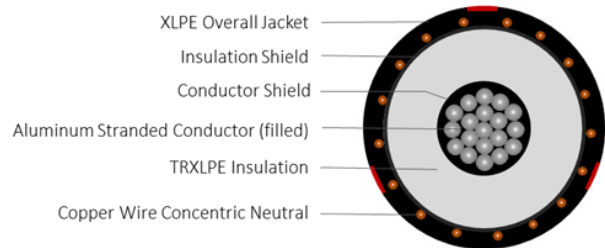

**SERIES E9JW**

### CONSTRUCTION

<b>CONDUCTOR</b>	1350 Aluminum (filled) Class B Strand Compressed
<b>STRAND SHIELD</b>	Thermoset semi-conducting polymer
<b>INSULATION</b>	Tree-retardant cross-linked polyethylene (TR-XLPE)
<b>INSULATION SHIELD</b>	Thermoset semi-conducting polymer
<b>SHIELD</b>	Helically applied, annealed, solid bare copper wires Reduced wire number per ICEA P-45-482 calculations
<b>JACKET</b>	Moisture blocked Cross-linked Polyethylene (XLPE)
<b>JACKET MARKING</b>	00000 FT LS CABLE XXXKCMIL (or AWG) FS AL 1/C 15KV 133% INSUL LEVEL 220 MILS TRXLPE 'No. of Neutral' X # 'Neutral size' MB XLPE JKT MV-105 (UL) MADE IN USA MM/DD/YYYY (LIGHTNING BOLT SYMBOL)
<b>PACKING</b>	Non-returnable reels

### STANDARDS (Compliance)

<b>PERFORMANCE</b>	AEIC CS8 ASTM B3 ASTM B230 ASTM B231 ICEA S-94-649 ICEA T-34-664 UL 1072 NEC
<b>OTHER</b>	EPA 40 CFR, Part 261 OSHA

## TR-XLPE/CN/XLPE, Type MV-105, Primary UD, 15kV 133%, 220mils Single Conductor Filled Aluminum - Silicone Free

SPECIFICATIONS							
Part Number	Conductor Size (AWG or kcmil)	Conductor Diameter (in)	Insulation Diameter (in)	Metallic Shield	Jacket Thickness (in)	Approx. O.D (in)	Approx. Weight (lbs/kft)
E9JWT-A36F01CA20	350	0.661	1.13	13 x 14 AWG (1/3N)	0.055	1.47	1,055
E9JWT-A66F01CA20	500	0.789	1.26	18 x 14 AWG (1/3N)	0.055	1.60	1,320

The dimensions and weights shown are approximate and subject to industry standards. Other designs available upon request.