

EPR/CN/XLPE, Type Primary UD (Unfilled)


Part Number: E9JYT-A31B01CA00

DESCRIPTION

The Medium Voltage Primary Underground Distribution (UD) cables consists of a Copper unfilled conductor, covered with Ethylene Propylene Rubber (EPR), a concentric neutral of helically applied copper wires, and a sunlight resistant cross-linked polyethylene (XLPE) jacket with 3 extruded red stripes.

APPLICATION

- Suitable for underground primary power applications
- For wet or dry locations
- For direct burial or in duct
- Excellent resistance to treeing
- Jacket is sunlight-resistance
- Designed to operate
 - » 105°C for normal operations
 - » 140°C for emergency overload
 - » 250°C for short circuit

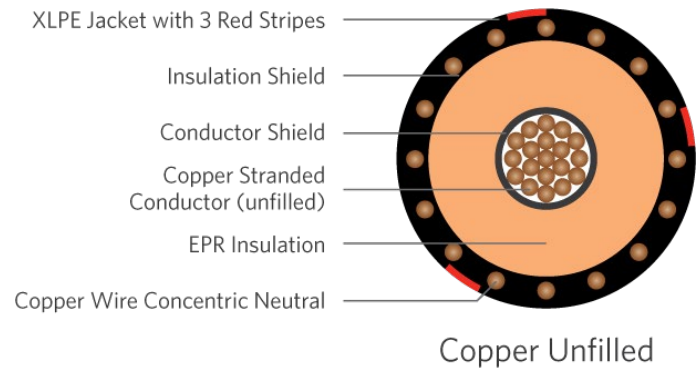

SPECIFICATIONS

Conductor	Bare copper compressed lay stranded Class B (unfilled)	Packaging	Non-returnable reels
Conductor Strand Shield	Extruded thermoset Semi-conducting polymer		ASTM B-3
Insulation	Ethylene Propylene Rubber (EPR)	Performance Compliance	ASTM B-230
Neutral	Solid copper wires		ASTM B-231
Jacket	Cross-Linked Polyethylene (XLPE)		ICEA S-94-649
			AEIC CS8
			UL 1072 (MV-105)
			RUS U1

1C 350kcmil 37-wires Copper (unfilled), 15kV 133% 220mils EPR, (21-wires copper x 14AWG) 1/3 reduced concentric neutral, XLPE jacket

PART NUMBER AND PHYSICAL CHARACTERISTICS							
Part Number	Conductor Size (AWG/kcmil)	Conductor Diameter (in.)	Copper Concentric Neutral	Insulation Diameter (in.)	Jacket Thickness (in.)	OD (in.)	Net Weight (lbs./MFT)
E9JYT-A31B01CA00	350	0.648	21 x 14AWG (1/3RCN)	1.132	0.055	1.460	1,855

The dimensions and weights shown are nominal and subject to industry standards.