


EPR/CN/XLPE, Type MV-105, Primary UD, 15kV 133%, 220-mils Single Conductor Aluminum (filled)—Silicone Free

DESCRIPTION

Medium Voltage Primary Underground Distribution (UD) cables consist of an aluminum (filled) conductor, covered with ethylene propylene rubber (EPR), a concentric neutral of helically applied copper wires, and a cross-linked polyethylene (XLPE) jacket with 3 extruded red stripes.

APPLICATIONS

- Suitable for underground primary power applications: direct burial or In duct.
- For wet or dry locations
- Jacket is sunlight resistant, meeting the 720-hr exposure test
- Excellent resistance to treeing
- Designed to operate continuously at a conductor temperature not exceeding
 - » 105°C for normal operations
 - » 140°C for emergency overload
 - » 250°C for short circuit

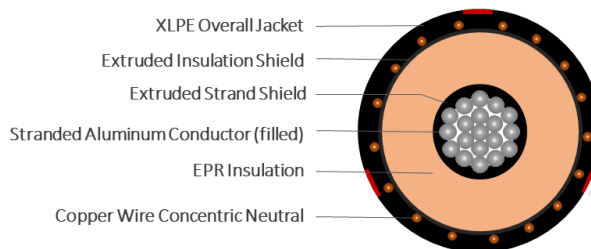

SERIES E9JYT

CONSTRUCTION

CONDUCTOR	Aluminum 1350 Class B Strand Compressed (filled)
STRAND SHIELD	Thermoset semi-conducting polymer
INSULATION	Ethylene Propylene Rubber (EPR)
INSULATION SHIELD	Thermoset semi-conducting polymer
SHIELD	Helically applied, annealed solid bare copper wires Reduced wire numbers per ICEA P-45-482 calculations
JACKET	Cross-Linked Polyethylene (XLPE) jacket with three red stripes
PACKAGING	Non-returnable reels

STANDARDS (Compliance)

PERFORMANCE	AEIC CS8 ASTM B3 ASTM B230 ASTM B231 ICEA P-45-482 ICEA S-94-649 UL 1072
--------------------	--

SPECIFICATIONS

Part Number	Conductor Size (kcmil)	Conductor Diameter (in)	Insulation Diameter (in)	Copper Concentric Neutrals (1/3 Neutral)	Jacket Thickness (in)	Approx. Overall Diameter (in)	Approx. Net Weight (lbs / Mft)
E9JYT-4A6F01CA00	350	0.661	1.13	13 x 14AWG	0.055	1.47	1,115

The dimensions and weights shown are nominal and subject to industry standards. Other designs available upon request.