

**TR-XLPE/CN/LLDPE, Type Primary UD (filled)**


Part Number: E9KKJ-B26F01CA00

**DESCRIPTION**

The Medium Voltage Primary Underground Distribution (UD) cables consist of an Aluminum (filled) conductor, covered with tree-retardant cross-linked polyethylene (TR- XLPE), a reduced concentric neutral of helically applied copper wires, and a linear low-density polyethylene (LLDPE) jacket with 3 extruded red stripes.

**APPLICATION**

- Suitable for underground primary power applications
- For wet or dry locations
- For direct burial or in duct
- Excellent resistance to treeing
- Jacket is sunlight-resistance
- Designed to operate
  - » 90°C for normal operations
  - » 130°C for emergency overload
  - » 250°C for short circuit

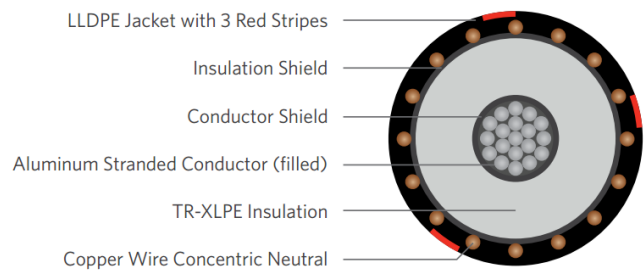

**SPECIFICATIONS**

<b>Conductor</b>	Aluminum 1350 compressed Lay stranded Class B (filled)
<b>Conductor Strand Shield</b>	Extruded thermoset Semi-conducting polymer
<b>Insulation</b>	Tree-Retardant Cross-linked Polyethylene (TR-XLPE)
<b>Insulation Shield</b>	Extruded thermoset Semi-conducting polymer
<b>Neutral</b>	Helically concentric wires
<b>Jacket</b>	Linear Low-Density Polyethylene

<b>Packaging</b>	Non-returnable reels
<b>Performance</b>	ASTM B-3
<b>Compliance</b>	ASTM B-230
	ASTM B-231
	ICEA S-94-649
	ICEA T-31-610 (filled)
	AEIC CS8
	UL 1072 (MV-90)
	RUS U1 (Upon request)

**1C 750kcmil 61-wires Aluminum (filled), 25kV 100% 260mils TR-XLPE, (19-wires copper x 14AWG) 1/6 reduced concentric neutral, LLDPE jacket**

**PART NUMBER AND PHYSICAL CHARACTERISTICS**

Part Number	Conductor Size (AWG/kcmil)	Conductor Diameter (in.)	Insulation Diameter (in.)	Copper Concentric Neutral	Jacket Thickness (in.)	OD (in.)	Net Weight (Lbs./MFT)
E9KKJ-B26F01CA00	750	0.949	1.521	19 x 14AWG 1/6RCN	0.080	1.929	1,841

The dimensions and weights shown are nominal and subject to industry standards. Other designs available upon request.