

TR-XLPE/CN/LLDPE Power, MV-90 Type Primary UD (Filled)


Part Number: E9KKU-1A6F01CA20

DESCRIPTION

The Medium Voltage Primary Underground Distribution (UD) cables consist of an Aluminum stranded filled conductor, covered with Tree Retardant Cross-Linked (TR-XLPE), a concentric neutral of helically applied copper wires, moisture block and a linear low-density polyethylene (LLDPE) jacket with 3 extruded red stripes.

APPLICATION

- Suitable for underground primary power applications
- For wet or dry locations
- For direct burial or in duct
- Excellent resistance to treeing
- Jacket is sunlight-resistance
- Designed to operate
 - » 90°C for normal operations
 - » 130°C for emergency overload
 - » 250°C for short circuit

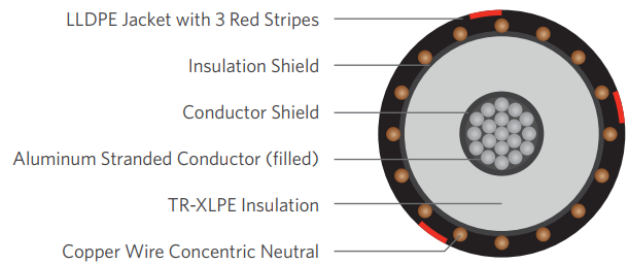

SPECIFICATIONS

Conductor	Aluminum 1350 Stranded, Class B (filled)
Conductor Strand Shield	Extruded thermoset Semi-conducting polymer
Insulation	Cross-Linked Polyethylene (TR-XLPE)
Neutral	Helically applied solid copper wires
Moisture Block	Powder
Jacket	Linear Low-Density Polyethylene

Packaging	Non-returnable reels
	ASTM B-3
	ASTM B-230
	ASTM B-609
Performance Compliance	ICEA S-94-649
	AEIC CS8
	UL 1072 (MV-90)
	RUS U1

1C 1/0AWG 19-wires Stranded filled Aluminum, 25kV 100% 260mils TR-XLPE, (11-wires copper x 14AWG) 2/3 reduced concentric neutral, with moisture block under LLDPE jacket

PART NUMBER AND PHYSICAL CHARACTERISTICS

Part Number	Conductor Size (AWG/kcmil)	Conductor Diameter (in.)	Insulation Diameter (in.)	Copper Concentric Neutral	Jacket Thickness (in.)	OD (in.)	Net Weight (lbs./MFT)
E9KKU-1A6F01CA20	1/0	0.355	0.911	11 x 14AWG (2/3RCN)	0.055	1.220	667

The dimensions and weights shown are nominal and subject to industry standards. Other designs available upon request.