


EPR/CN/LLDPE, Type MV-90, Primary UD, 25kV 100%, 260-mils Single Conductor Un-Filled Copper - Silicone Free

DESCRIPTION

This specification covers cables that consist of Copper unfilled conductor, covered with ethylene propylene rubber (EPR), a concentric neutral of helically applied copper wires, and linear low density polyethylene (LLDPE) jacket with 3 extruded red stripes

APPLICATIONS

- Suitable for underground primary power applications: direct burial or In duct.
- For wet or dry locations
- Jacket is sunlight resistant, meeting the 720-hr exposure test
- Excellent resistance to treeing
- Designed to operate continuously at a conductor temperature not exceeding
 - » 90°C for normal operations
 - » 130°C for emergency overload
 - » 250°C for short circuit

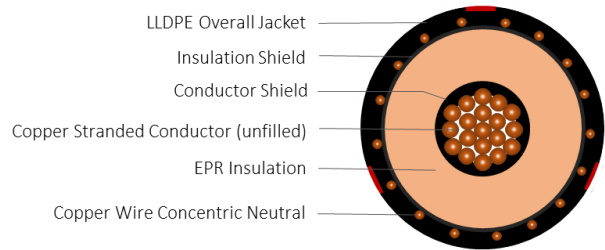

CONSTRUCTION

CONDUCTOR	Annealed bare copper (unfilled) Class B Strand Compressed
STRAND SHIELD	Thermoset semi-conducting polymer
INSULATION	Ethylene propylene rubber (EPR)
INSULATION SHIELD	Thermoset semi-conducting polymer
SHIELD	Helically applied, annealed solid bare copper wires
JACKET	Linear low-density polyethylene (LLDPE)
PACKAGING	Non-returnable reels

STANDARDS (Compliance)

PERFORMANCE	AEIC CS8 ASTM B-3 ASTM B-8 ICEA S-94-649 UL 1072
--------------------	--

SPECIFICATIONS

Part Number	Conductor Size (kcmil)	Conductor Diameter (in)	Insulation Diameter (in)	Copper Concentric Neutrals	Jacket Thickness (in)	Approx. O.D. (in)	Approx. Net Weight (lbs/kft)
E9KPT-B21B01CA00	750	0.968	1.52	25 x 10 AWG (1/3N)	0.080	1.99	4,110

The dimensions and weights shown are nominal and subject to industry standards. Other designs available upon request.