


## EPR/CN/LLDPE, Type MV-90, Primary UD, 25kV 100%, 260-mils Single Conductor Filled Aluminum - Silicone Free

### DESCRIPTION

This specification covers cables that consist of Aluminum filled conductor, covered with ethylene propylene rubber (EPR), a concentric neutral of helically applied copper wires, and linear low density polyethylene (LLDPE) jacket with 3 extruded red stripes

### APPLICATIONS

- Suitable for underground primary power applications: direct burial or In duct.
- For wet or dry locations
- Jacket is sunlight resistant, meeting the 720-hr exposure test
- Excellent resistance to treeing
- Designed to operate continuously at a conductor temperature not exceeding
  - » 105°C for normal operations
  - » 140°C for emergency overload
  - » 250°C for short circuit

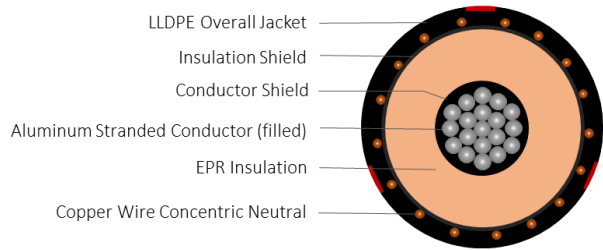

### CONSTRUCTION

<b>CONDUCTOR</b>	1350 Aluminum (filled) Class B Strand Compressed
<b>STRAND SHIELD</b>	Thermoset semi-conducting polymer
<b>INSULATION</b>	Ethylene propylene rubber (EPR)
<b>INSULATION SHIELD</b>	Thermoset semi-conducting polymer
<b>SHIELD</b>	Helically applied, annealed solid bare copper wires
<b>JACKET</b>	Linear low-density polyethylene (LLDPE)
<b>PACKAGING</b>	Non-returnable reels

### STANDARDS (Compliance)

<b>PERFORMANCE</b>	AEIC CS8 ASTM B-3 ASTM B-230 ASTM B-231 ICEA S-94-649 ICEA T-31-610 UL 1072
--------------------	---

### SPECIFICATIONS

Part Number	Conductor Size (kcmil)	Conductor Diameter (in)	Insulation Diameter (in)	Copper Concentric Neutrals	Jacket Thickness (in)	Approx. O.D. (in)	Approx. Net Weight (lbs/kft)
E9KPW-B56F01CA01	1000	1.117	1.67	12 x 12 AWG (1/8N)	0.080	2.12	2,345

The dimensions and weights shown are nominal and subject to industry standards. Other designs available upon request.