


**TR-XLPE/CN/XLPE, Type MV-105, Primary UD, 25kV 133%, 320-MILS  
Single Conductor Un-Filled Aluminum -Silicone Free**

**DESCRIPTION**

This specification covers cables that consist of Aluminum un-filled conductor, covered with tree-retardant cross-linked polyethylene (TR-XLPE), a concentric neutral of helically applied copper wires, and a cross-linked polyethylene (XLPE) jacket.

**APPLICATIONS**

- Suitable for underground primary power applications: direct burial or in duct.
- For wet or dry locations
- Jacket is sunlight resistant, meeting the 720-hr exposure test
- Excellent resistance to treeing
- Designed to operate continuously at a conductor temperature not exceeding
  - 105°C for normal operations
  - 140°C for emergency overload
  - 250°C for short circuit

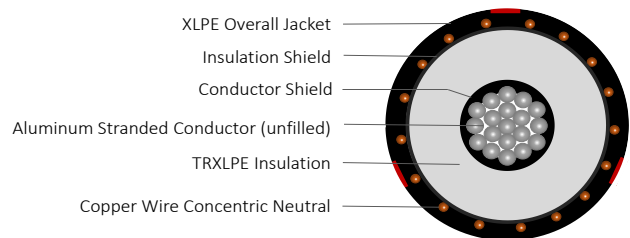

CONSTRUCTION	
<b>CONDUCTOR</b>	1350 Aluminum (unfilled) Class B Strand Compressed
<b>STRAND SHIELD</b>	Thermoset semi-conducting polymer
<b>INSULATION</b>	Tree-retardant cross-linked polyethylene (TR-XLPE)
<b>INSULATION SHIELD</b>	Thermoset semi-conducting polymer
<b>SHIELD</b>	Helically applied, annealed, solid bare copper wires
<b>JACKET</b>	Cross-linked Polyethylene (XLPE)
<b>PACKAGING</b>	Non-returnable wooden reels

STANDARDS (Compliance)	
<b>PERFORMANCE</b>	AEIC CS8
	ASTM B-3
	ASTM B-230
	ASTM B-231
	ICEA S-94-649
	UL 1072

SPECIFICATIONS							
Part Number	Conductor Size	Conductor Diameter (in)	Insulation Diameter (in)	Metallic Shield	Jacket Thickness (in)	Approx. Overall Diameter (in)	Approx. Net Weight (lbs/kft)
E9LWT-013F01CA00	1 AWG	0.322	0.99	6 x 14 AWG (1/3N)	0.055	1.31	673
E9LWT-3A3F01CA00	3/0 AWG	0.456	1.12	7 x 14 AWG (1/3N)	0.055	1.46	869

\*The dimensions and weights shown are nominal and subject to industry standards. Other designs available upon request.