

TR-XLPE/CN/LLDPE, Type Primary UD, 35kV 100%, 345-mils


Part Number: E9MKJ-C26F01CA00

DESCRIPTION

The Medium Voltage Primary Underground Distribution (UD) cables consist of an aluminum (Filled) conductor, covered with tree-retardant cross-linked polyethylene (TR- XLPE), a concentric neutral of helically applied copper wires, and a sunlight resistant linear low-density polyethylene (LLDPE) jacket with 3 extruded red stripes.

APPLICATION

- Suitable for underground primary power applications
- For wet or dry locations
- For direct burial or in duct
- Jacket is sunlight resistant, meeting the 720-hr exposure test
- Designed to operate continuously at a conductor temperature not exceeding
 - » 90°C for normal operations
 - » 130°C for emergency overload
 - » 250°C for short circuit

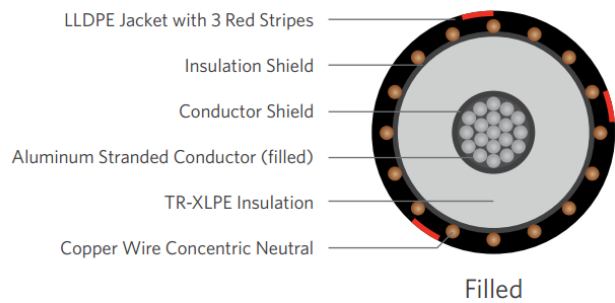

SPECIFICATIONS

Conductor	Aluminum 1350 compressed stranded Class B (filled)
Conductor Shield	Extruded thermoset Semi-conducting polymer
Insulation	Tree-Retardant Cross-linked Polyethylene (TR-XLPE)
Insulation Shield	Extruded thermoset Semi-conducting polymer
Neutral	Solid Bare Copper Concentric Neutral
Jacket	Linear Low-Density Polyethylene

Packaging	Non-returnable reels
Performance Compliance	ASTM B-3, B-230, B-231 ICEA S-94-649 ICEA T-31-610 AEIC CS8 RUS U1 UL 1072 (MV-90)

1/C 1500kcmil Aluminum (Filled), 35kV 100% 345mils TR-XLPE, 1/6 Neutral with LLDPE Jacket

PART NUMBER AND PHYSICAL CHARACTERISTICS

Part Number	Conductor Size (AWG/kcmil)	Conductor Diameter (inches)	Insulation Diameter (inches)	Copper Concentric Neutrals	Jacket Thickness (inches)	Overall Diameter (inches)	Weight (lbs./MFT)
E9MKJ-C26F01CA00	1500	1.370	2.120	24 x 12	0.080	2.575	3385

The dimensions and weights shown are nominal and subject to industry standards and manufacturing tolerances. Other designs available upon request.