


**TR-XLPE/CN/LLDPE, Type Primary UD, 35kV 100%, 345-mils;
Series E9MKT- (see specific dimensions below) with 1/3rd CN**

DESCRIPTION

The Medium Voltage Primary Underground Distribution (UD) cables consist of an Aluminum (unfilled) conductor, covered with tree-retardant cross-linked polyethylene (TR- XLPE), a concentric neutral of helically applied copper wires, and a linear low-density polyethylene (LLDPE) jacket with 3 extruded red stripes.

APPLICATION

- Suitable for underground primary power applications
- For wet or dry locations
- For direct burial or in duct
- Jacket is sunlight resistant, meeting the 720-hr exposure test
- Designed to operate continuously at a conductor temperature not exceeding
 - » 90°C for normal operations
 - » 130°C for emergency overload
 - » 250°C for short circuit

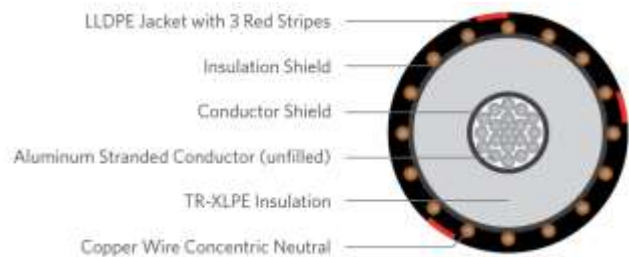

SPECIFICATIONS

Conductor	Aluminum 1350 compressed Lay stranded Class B (unfilled)
Conductor Strand Shield	Extruded thermoset semi-conducting polymer
Insulation	Tree-Retardant Cross-linked Polyethylene (TR-XLPE)
Neutral	Solid copper wires
Jacket	Linear Low-Density Polyethylene

Packaging	Non-returnable reels ASTM B-3, B-230, B-231 ICEA S-94-649 AEIC CS8
Performance Compliance	UL 1072 (MV-90) RUS U1

1C; Aluminum (unfilled), 35kV, 100%, 345-mils TR-XLPE, 1/3rd reduced concentric neutral, with a LLDPE jacket

PART NUMBER AND PHYSICAL CHARACTERISTICS

Part Number	Conductor Size (AWG/kcmil)	Conductor Diameter (in.)	Copper Concentric Neutral	Insulation Diameter (in.)	Jacket Thickness (in.)	OD (in.)	Net Weight (lbs.MFT)
E9MKT-1A3F01CA00	1/0 AWG	.355	6 X #14 cu	1.08	.055	1.41	771
E9MKT-4A3F01CA00	4/0 AWG	.502	11 X #14cu	1.23	.055	1.56	1,026
E9MKT-A63F01CA00	500KCM	.773	25 X #14cu	1.51	.080	1.92	1,751

The dimensions and weights shown are nominal and subject to industry standards.