

TR-XLPE/CN/LLDPE, Type Primary UD (Unfilled)


Part Number: E9MKT-B53F01CA00

DESCRIPTION

The Medium Voltage Primary Underground Distribution (UD) cables consist of an aluminum (unfilled) conductor, covered with tree-retardant cross-linked polyethylene (TR- XLPE), a concentric neutral of helically applied copper wires, and a sunlight resistant linear low-density polyethylene (LLDPE) jacket with 3 extruded red stripes.

APPLICATION

- Suitable for underground primary power applications
- For wet or dry locations
- For direct burial or in duct
- Jacket is sunlight resistant, meeting the 720-hr exposure test
- Designed to operate continuously at a conductor temperature not exceeding
 - » 90°C for normal operations
 - » 130°C for emergency overload
 - » 250°C for short circuit

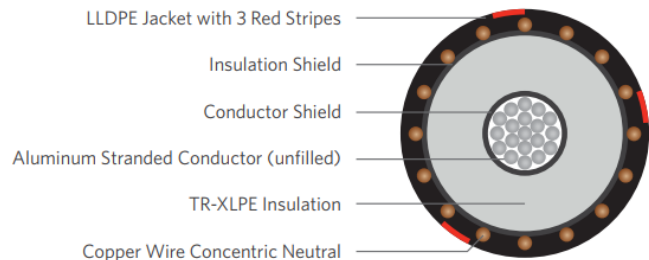

SPECIFICATIONS

Conductor	Aluminum 1350 compressed stranded Class B (unfilled)
Conductor Strand Shield	Extruded thermoset Semi-conducting polymer
Insulation	Tree-Retardant Cross-linked Polyethylene (TR-XLPE)
Neutral	Concentric Neutral
Jacket	Linear Low-Density Polyethylene

Packaging	Non-returnable reels ASTM B-3, B-230, B-231 ICEA S-94-649
Performance	ICEA T-31-610
Compliance	AEIC CS8 RUS U1 UL 1072 (MV-90)

1C 1000kcmil 61-wires Aluminum (unfilled), 35kV 100% 345mils TR-XLPE, (31-wires copper x 12AWG) 1/3 reduced concentric neutral, LLDPE jacket

PART NUMBER AND PHYSICAL CHARACTERISTICS

Part Number	Conductor Size (AWG/kcmil)	Conductor Diameter (in.)	Insulation Diameter (in.)	Copper Concentric Neutral	Jacket Thickness (in.)	OD (in.)	Net Weight (lbs./MFT)
E9MKT-B53F01CA00	1000KCM	1.10	1.84	31 x #12cu	.080	2.24	2,751

The dimensions and weights shown are nominal and subject to industry standards and manufacturing tolerances. Other designs available upon request.