

**TR-XLPE/CN/LLDPE, Type Primary UD**


Part Number: E9MKT-B86F01CA00

**DESCRIPTION**

The Medium Voltage Primary Underground Distribution (UD) cables consist of an aluminum (filled) conductor, covered with tree-retardant cross-linked polyethylene (TR- XLPE), a concentric neutral of helically applied copper wires, and a sunlight resistant linear low-density polyethylene (LLDPE) jacket with 3 extruded red stripes.

**APPLICATION**

- Suitable for underground primary power applications
- For wet or dry locations
- For direct burial or in duct
- Jacket is sunlight resistant, meeting the 720-hr exposure test
- Designed to operate continuously at a conductor temperature not exceeding
  - » 90°C for normal operations
  - » 130°C for emergency overload
  - » 250°C for short circuit

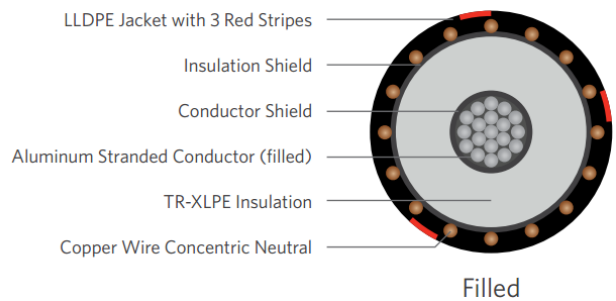

**SPECIFICATIONS**

<b>Conductor</b>	Aluminum 1350 compressed stranded Class B (filled)
<b>Conductor Strand Shield</b>	Extruded thermoset Semi-conducting polymer
<b>Insulation</b>	Tree-Retardant Cross-linked Polyethylene (TR-XLPE)
<b>Neutral</b>	Concentric Neutral
<b>Jacket</b>	Linear Low-Density Polyethylene

<b>Packaging</b>	Non-returnable reels ASTM B-3, B-230, B-231 ICEA S-94-649 ICEA T-31-610
<b>Performance Compliance</b>	AEIC CS8 RUS U1 (upon request) UL 1072 (MV-90)

**1C 1250kcmil 91-wires Aluminum (Filled), 35kV 100% 345mils TR-XLPE, (24-wires copper x 10AWG) 1/3 reduced concentric neutral, with LLDPE jacket**

**PART NUMBER AND PHYSICAL CHARACTERISTICS**

Part Number	Conductor Size (AWG/kcmil)	Conductor Diameter (in.)	Copper Concentric Neutral	Insulation Diameter (in.)	Jacket Thickness (in.)	OD (in.)	Net Weight (lbs./MFT)
<b>Design with filled stranded aluminum</b>							
E9MKT-B86F01CA00	1250	1.230	24 x 10AWG (1/3RCN)	1.980	0.080	2.380	3,241

The dimensions and weights shown are nominal and subject to industry standards and manufacturing tolerances. Other designs available upon request.