


TRXLPE/CN/LLDPE, Type MV-90, Primary UD, 35kV 100%, 345-mils Single Conductor 1500 kcmil, Aluminum, 1/3 Neutral

DESCRIPTION

Medium Voltage Primary Underground Distribution (UD) cables consist of an Aluminum (filled) conductor, covered with tree-retardant cross-linked polyethylene(TRXLPE), a concentric neutral of helically applied copper wires, and a linear low-density polyethylene (LLDPE) jacket with 3 extruded red stripes.

APPLICATIONS

- Suitable for underground primary power applications: direct burial or In duct.
- For wet or dry locations
- Jacket is sunlight resistant
- Excellent resistance to treeing
- Designed to operate continuously at a conductor temperature not exceeding
 - » 90°C for normal operations
 - » 130°C for emergency overload
 - » 250°C for short circuit

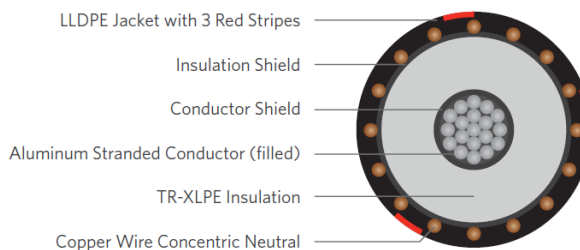

SERIES E9MKT

CONSTRUCTION

CONDUCTOR	1350 AL, Class B Strand (filled)
STRAND SHIELD	Thermoset semi-conducting polymer
INSULATION	Tree-retardant cross-linked Polyethylene (TRXLPE)
INSULATION SHIELD	Thermoset semi-conducting polymer
SHIELD	Helically applied, annealed solid bare copper wires
JACKET	Linear Low Density Polyethylene (LLDPE), Three red Stripes
PACKAGING	Non-returnable reels

STANDARDS (Compliance)

PERFORMANCE	AEIC CS8 ASTM B3 ASTM B231 ICEA S-94-649 ICEA T-31-610 UL 1072 (MV-90) RUS U1
--------------------	---

SPECIFICATIONS

Part Number	Conductor Size AWG or kcmil	Conductor Diameter (in)	Copper Concentric Neutrals	Insulation Diameter (in)	Jacket Thickness (in)	O.D. (in)	Net Weight (lbs / kft)
E9MKT-C26F01CA00	1500	1.370	30x 10AWG	2.093	0.080	2.58	3,843

The dimensions and weights shown are nominal and subject to industry standards. Other designs available upon request.