


TRXLPE/CN/LLDPE, Type MV-90, Primary UD, 35kV 100%, 345-mils Single Conductor 3/0 AWG Aluminum, 2/3Round Concentric Neutral

DESCRIPTION

Medium Voltage Primary Underground Distribution (UD) cables consist of an Aluminum (unfilled) conductor, covered with tree-retardant cross-linked polyethylene(TRXLPE), a concentric neutral of helically applied copper wires, and a linear low-density polyethylene (LLDPE) jacket with 3 extruded red stripes.

APPLICATIONS

- Suitable for underground primary power applications: direct burial or In duct.
- For wet or dry locations
- Jacket is sunlight resistant
- Excellent resistance to treeing
- Designed to operate continuously at a conductor temperature not exceeding
 - » 90°C for normal operations
 - » 130°C for emergency overload
 - » 250°C for short circuit

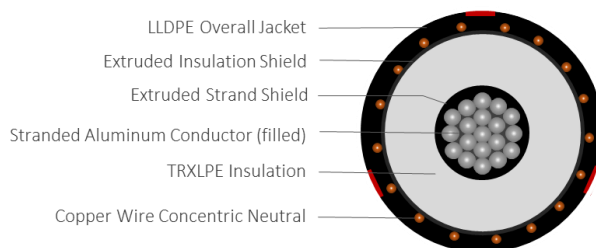

SERIES E9MKU

CONSTRUCTION

CONDUCTOR	1350 AL, Class B Strand (filled)
STRAND SHIELD	Thermoset semi-conducting polymer
INSULATION	Tree-retardant cross-linked Polyethylene (TRXLPE)
INSULATION SHIELD	Thermoset semi-conducting polymer
SHIELD	Helically applied, annealed solid bare copper wires
JACKET	Linear Low Density Polyethylene (LLDPE), three red stripes
PACKAGING	Wood reels

STANDARDS (Compliance)

PERFORMANCE	AEIC CS8 ASTM B3 ASTM B231 ICEA S-94-649 ICEA T-31-610 UL 1072 (MV-90) RUS U1
--------------------	---

SPECIFICATIONS

Part Number	Conductor Size AWG	Conductor Diameter (in)	Nominal Insulation Diameter (in)	Copper Concentric Neutrals	Nominal Jacket Thickness (in)	Approximate O.D. (in)	Approximate Net Weight (lbs / Kft)
E9MKU-3A6F01CA00	3/0	0.456	1.17	17 x #14	0.055	1.51	1,040

The dimensions and weights shown are nominal and subject to industry standards. Other designs available upon request.