


**TR-XLPE/CN/XLPE, Type MV-105, Primary UD, 35kV 100%, 345-MILS
Single Conductor Un-Filled Aluminum -Silicone Free**

DESCRIPTION

This specification covers cables that consist of Aluminum un-filled conductor, covered with tree-retardant cross-linked polyethylene (TR-XLPE), a concentric neutral of helically applied copper wires, and a cross-linked polyethylene (XLPE) jacket.

APPLICATIONS

- Suitable for underground primary power applications: direct burial or in duct.
- For wet or dry locations
- Jacket is sunlight resistant, meeting the 720-hr exposure test
- Excellent resistance to treeing
- Designed to operate continuously at a conductor temperature not exceeding
 - 105°C for normal operations
 - 140°C for emergency overload
 - 250°C for short circuit

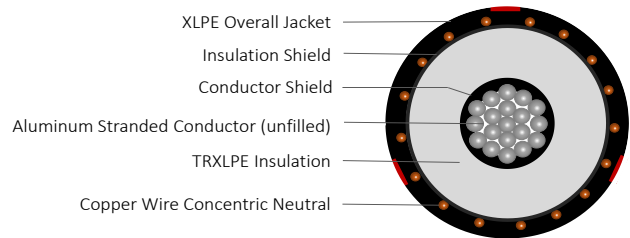

| CONSTRUCTION | | STANDARDS (Compliance) | |
|--------------------------|---|------------------------|--|
| CONDUCTOR | 1350 Aluminum (unfilled) Class B Strand Compressed | PERFORMANCE | AEIC CS8 ASTM B-3 ASTM B-230 ASTM B-231 ICEA S-94-649 UL 1072 |
| STRAND SHIELD | Thermoset semi-conducting polymer | | |
| INSULATION | Tree-retardant cross-linked polyethylene (TR-XLPE) | | |
| INSULATION SHIELD | Thermoset semi-conducting polymer | | |
| SHIELD | Helically applied, annealed, solid bare copper wires | | |
| JACKET | Cross-linked Polyethylene (XLPE) | | |
| PACKAGING | Non-returnable wooden reels | | |

| SPECIFICATIONS | | | | | | | |
|------------------|----------------|-------------------------|--------------------------|--------------------|-----------------------|-------------------------------|------------------------------|
| Part Number | Conductor Size | Conductor Diameter (in) | Insulation Diameter (in) | Metallic Shield | Jacket Thickness (in) | Approx. Overall Diameter (in) | Approx. Net Weight (lbs/kft) |
| E9MWJ-C23F01CA00 | 1500 kcmil | 1.37 | 2.10 | 18 x 12 AWG (1/6N) | 0.080 | 2.55 | 3,247 |

**The dimensions and weights shown are nominal and subject to industry standards. Other designs available upon request.*