


## TR-XLPE/CN/XLPE, Type MV-105, Primary UD, 35kV 100%, 345-mils Single Conductor 1/0 AWG, Aluminum, 1/2 Reduced Neutral

### DESCRIPTION

Medium Voltage Primary Underground Distribution (UD) cables consist of an aluminum (filled) conductor, covered with tree-retardant cross-linked polyethylene (TR- XLPE), a concentric neutral of helically applied copper wires, and a cross-linked polyethylene (XLPE) moisture blocked jacket with 3 extruded red stripes.

### APPLICATIONS

- Suitable for underground primary power applications: direct burial or In duct.
- For wet or dry locations
- Jacket is sunlight resistant, meeting the 720-hr exposure test
- Excellent resistance to treeing
- Designed to operate continuously at a conductor temperature not exceeding
  - » 105°C for normal operations
  - » 140°C for emergency overload
  - » 250°C for short circuit

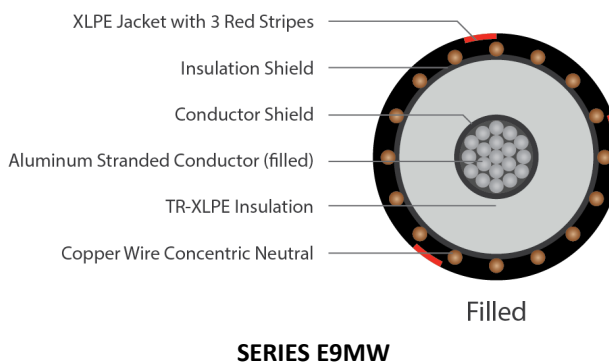

### CONSTRUCTION

<b>CONDUCTOR</b>	1350 AL, Class B Strand (filled)
<b>STRAND SHIELD</b>	Thermoset semi-conducting polymer
<b>INSULATION</b>	Tree-Retardant Cross-Linked Polyethylene (TR-XLPE)
<b>INSULATION SHIELD</b>	Thermoset semi-conducting polymer
<b>SHIELD</b>	Helically applied, annealed solid bare copper wires

### CONSTRUCTION cont'd

<b>JACKET</b>	Cross-Linked Polyethylene (XLPE) and three red stripes Water swellable powder
---------------	--

**PACKAGING** Non-returnable reels

### STANDARDS (Compliance)

<b>PERFORMANCE</b>	AEIC CS8 ASTM B3 ASTM B231 ICEA S-94-649 ICEA T-34-664 UL 1072 RUS U1
--------------------	---

## SPECIFICATIONS

Part Number	Conductor Size AWG or kcmil	Conductor Diameter (in)	Copper Concentric Neutrals	Insulation Diameter (in)	Jacket Thickness (in)	O.D. (in)	Net Weight (lbs / Mft)
E9MWV-1A6F01CA20	1/0	0.358	6x 14AWG	1.10	0.055	1.40	734

The dimensions and weights shown are nominal and subject to industry standards. Other designs available upon request.