


TR-XLPE/CN/XLPE, Type MV-105, Primary UD, 35kV 133%, 420-mils Single Conductor Filled Aluminum

DESCRIPTION

Medium Voltage Primary Underground Distribution (UD) cables consist of an aluminum (filled) conductor, covered with tree-retardant cross-linked polyethylene (TR- XLPE), a concentric neutral of helically applied copper wires, and a cross-linked polyethylene (XLPE) moisture blocked jacket with 3 extruded red stripes.

APPLICATIONS

- Suitable for underground primary power applications: direct burial or In duct.
- For wet or dry locations
- Jacket is sunlight resistant, meeting the 720-hr exposure test
- Excellent resistance to treeing
- Designed to operate continuously at a conductor temperature not exceeding
 - » 105°C for normal operations
 - » 140°C for emergency overload
 - » 250°C for short circuit

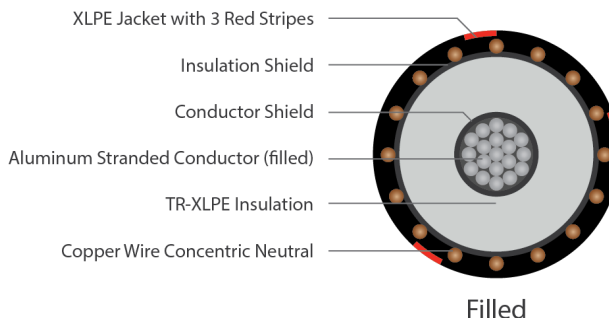

SERIES E9MW

CONSTRUCTION

CONDUCTOR	1350 Aluminum, Class B Strand Compressed (filled)
STRAND SHIELD	Thermoset semi-conducting polymer
INSULATION	Tree-Retardant Cross-Linked Polyethylene (TR-XLPE)
INSULATION SHIELD	Thermoset semi-conducting polymer
SHIELD	Helically applied, annealed solid bare copper wires Reduced wire numbers per ICEA P-45-482 calculations
JACKET	Moisture blocked Cross-Linked Polyethylene (XLPE) jacket with three red stripes
PACKAGING	Non-returnable reels

STANDARDS (Compliance)

PERFORMANCE	AEIC CS8 ASTM B3 ASTM B230 ASTM B231 ICEA P-45-482 ICEA S-94-649 ICEA T-34-664 ICEA UL 1072 RUS U1
--------------------	---

SPECIFICATIONS

Part Number	Conductor Size kcmil	Conductor Diameter (in)	Insulation Diameter (in)	Concentric Neutrals (Full Neutral)	Jacket Thickness (in)	Overall Diameter (in)	Net Weight (lbs / Mft)
E9NWM-A16F01CA20	250	0.558	1.43	29 x 14AWG	0.080	0.82	1,555

The dimensions and weights shown are nominal and subject to industry standards. Other designs available upon request.