


XLPE/PVC, 600V, Type TC-ER, LV Power Three or Four Copper Conductors

DESCRIPTION

The XLPE/PVC (XHHW-2), 600V Power Type TC-ER cables consist of fully annealed bare copper class B stranded conductors, covered with cross-linked polyethylene (XLPE) insulation, unshielded and black polyvinyl chloride (PVC) jacket. These cables are used in industrial power.

APPLICATIONS

- In conduit, duct, free air raceways and direct burial, primary installations include cable trays, and outdoor locations.
- In wet or dry locations. Rated at 90°C wet and dry.
- Approved for Class I, Div. 2 industrial hazardous locations per NEC
- Permitted for Exposed Run (ER) use in accordance with NEC for 3 or more conductors

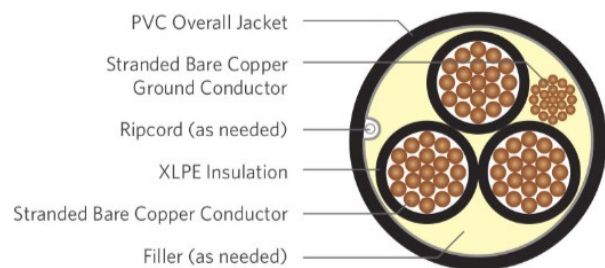

SERIES C6XP

CONSTRUCTION

CONDUCTOR	Bare annealed Copper, Class B Compressed Strand
INSULATION	Cross-linked Polyethylene (XLPE) (XHHW-2)
COLOR CODE	ICEA S-58-679 Method 4 · Black insulation with numbering
GROUND	Uninsulated, Bare annealed Copper, Class B Compressed Strand
JACKET	Polyvinyl Chloride (PVC)
JACKET MARKING	00000 FT LS CABLE XXXAWG CU 3/C (or 4/C) WITH GND XHHW-2 PVC JKT 600V 90C WET OR DRY TYPE TC-ER (UL) SUN RES DIR BUR MADE IN USA MM/DD/YYYY
PACKING	Non-returnable reels

STANDARDS (Compliance)

PERFORMANCE	ASTM B8 UL 44 UL 1277 UL 1685 ICEA S-95-658 NEC
OTHER	EPA 40 CFR, Part 261 OSHA

XLPE/PVC, 600V, Type TC-ER, LV Power Three or Four Copper Conductors

SPECIFICATIONS							
Part Number	Conductor Count	Conductor Size (AWG or kcmil)	Ground Size (AWG)	Insulation Thickness (in)	Jacket Thickness (in)	Approx. O.D (in)	Approx. Weight (lbs/kft)
C6XP-60CB-03CGE-ZZZ-Z	3	600	2	0.080	0.110	2.47	6,780

The dimensions and weights shown are approximate and subject to industry standards. Other designs available upon request.