


TR-XLPE/CTS/PVC Power, Type MV-105, 35kV 133% Single Conductor Un-Filled Copper - Silicone Free

DESCRIPTION

The Medium Voltage, TR-XLPE/Cu Tape Shield/PVC, Type MV-105 Cables that consist of a copper un-filled conductor, covered with tree-retardant cross-linked polyethylene (TR-XLPE), copper taped shield (CTS) and a polyvinyl chloride (PVC) jacket. These cables are used in industrial power circuits.

APPLICATIONS

- Primary installations include cable tray, outdoor locations, in conduit, duct, free air, and raceways.
- Direct buried if installed in a system with a ground conductors that is in close proximity and conforms with NEC 250.4 (A)(5).
- In wet or dry locations. Rated 105°C wet or dry.
- Approved for Class I, Div. 2 industrial hazardous locations per NEC.
- Excellent sunlight resistance.
- For CT use for 1/0AWG and larger, per UL 1072.
- Designed to operate continuously at a conductor temperature not exceeding
 - » 105°C for normal operations
 - » 140°C for emergency overload
 - » 250°C for short circuit

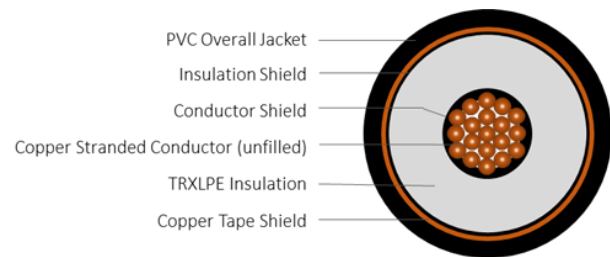

SERIES G35BTP

CONSTRUCTION

CONDUCTOR	Fully annealed bare copper (unfilled) Class B compressed strand
STRAND SHIELD	Extruded thermoset semi-conducting polymer over the conductor
INSULATION	Tree-retardant cross-linked polyethylene (TR-XLPE)
INSULATION SHIELD	Extruded thermoset semi-conducting polymer over the insulation
SHIELD	5 mil annealed copper tape helically applied with approximately 25% overlap
JACKET	Black Polyvinyl Chloride (PVC)
JACKET MARKING	00000 FT LS CABLE XXXKCMIL (or AWG) CU 1/C 35KV 133% INSUL LEVEL 420 MILS TRXLPE/PVC JKT MV-105 FOR CT USE (UL) SUN RES MADE IN USA MM/DD/YYYY (LIGHTNING BOLT SYMBOL)
PACKING	Non-returnable wood reels

STANDARDS (Compliance)

PERFORMANCE	AEIC CS8 ASTM B3 ASTM B8 ICEA S-93-639 ICEA S-97-682 UL 1072 NEC
OTHER	EPA 40 CFR, Part 261 OSHA

TR-XLPE/CTS/PVC Power, Type MV-105, 35kV 133% Single Conductor Un-Filled Copper - Silicone Free

SPECIFICATIONS						
Part Number	Conductor Size (AWG/kcmil)	Conductor Diameter (in)	Insulation Diameter (in)	Jacket Thickness (in)	Approx. O.D (in)	Approx. Weight (lbs/kft)
G35BTP-1ACB-1CZ-T5Z-Z	1/0	0.362	1.27	0.075	1.51	1,150
G35BTP-35CB-1CZ-T5Z-Z	350	0.661	1.58	0.105	1.89	2,265
G35BTP-75CB-1CZ-T5Z-Z	750	0.968	1.91	0.105	2.22	3,770
G35BTP-A1CB-1CZ-T5Z-Z	1000	1.117	2.06	0.105	2.40	4,725

The dimensions and weights shown are approximate and subject to industry standards. Other designs available upon request.