


## TR-XLPE/CN/LLDPE, Type MV-90, Primary UD, 15kV 133%, 220-MILS Single Conductor Filled Aluminum -Silicone Free

### DESCRIPTION

This specification covers cables that consist of Aluminum filled conductor, covered with tree-retardant cross-linked polyethylene (TR-XLPE), a concentric neutral of helically applied copper wires, and a moisture blocked linear low density polyethylene (LLDPE) jacket with 3 extruded red stripes.

### APPLICATIONS

- Suitable for underground primary power applications: direct burial or in duct.
- For wet or dry locations.
- Jacket is sunlight resistant.
- Excellent resistance to treeing.
- Designed to operate continuously at a conductor temperature not exceeding
  - >> 90°C for normal operations
  - >> 130°C for emergency overload
  - >> 250°C for short circuit

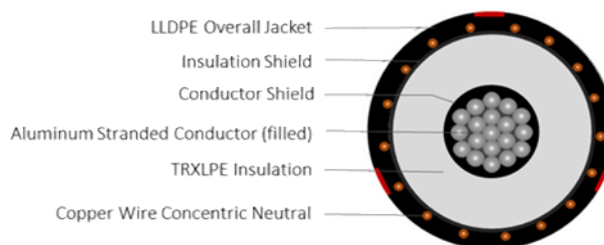

CONSTRUCTION		STANDARDS (Compliance)	
CONDUCTOR	1350 Aluminum (filled) Class B Strand Compressed	PERFORMANCE	AEIC CS8 ASTM B3 ASTM B230 ASTM B231 ICEA S-94-649 ICEA-T-34-664 UL 1072
STRAND SHIELD	Thermoset semi-conducting polymer		
INSULATION	Tree-retardant cross-linked polyethylene (TR-XLPE)		
INSULATION SHIELD	Thermoset semi-conducting polymer		
SHIELD	Helically applied, annealed, solid bare copper wires		
JACKET	Moisture blocked Linear low-density polyethylene (LLDPE)		
PACKAGING	Non-returnable wooden reels		

SPECIFICATIONS							
Part Number	Conductor Size	Conductor Diameter (in)	Insulation Diameter (in)	Metallic Shield	Jacket Thickness (in)	Approx. Overall Diameter (in)	Approx. Net Weight (lbs/kft)
U15BTL-A1FB-1CZ-R3T-M	1000 kcmil	1.117	1.65	20 x 10 AWG (1/3N)	0.075	2.15	2,590

\*The dimensions and weights shown are approximate and subject to industry standards. Other designs available upon request.