


TR-XLPE/CN/XLPE Power, MV-105 Type Primary UD, 35kV 100% Single Conductor Un-Filled Copper - Silicone Free

DESCRIPTION

The Medium Voltage Underground Distribution (UD) cables consist of a copper un-filled conductor, covered with tree-retardant cross-linked polyethylene (TR-XLPE), a concentric neutral of helically applied copper wires, and a Cross-linked polyethylene (XLPE) jacket with 3 extruded red stripes.

APPLICATIONS

- Suitable for underground primary power applications: direct burial or in duct.
- For wet or dry locations.
- Jacket is sunlight resistant.
- Excellent resistance to treeing
- Designed to operate continuously at a conductor temperature not exceeding
 - » 105°C for normal operations
 - » 140°C for emergency overload
 - » 250°C for short circuit

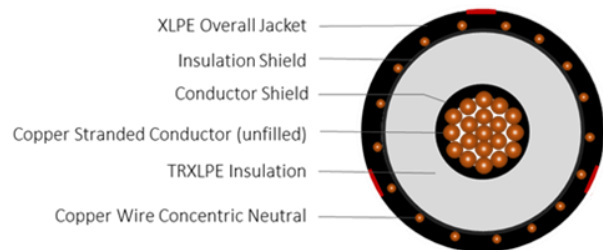

SERIES U35ATX

CONSTRUCTION

CONDUCTOR	Fully annealed bare copper (unfilled) Class B compressed strand
STRAND SHIELD	Extruded thermoset semi-conducting polymer over the conductor
INSULATION	Tree-retardant cross-linked polyethylene (TR-XLPE)
INSULATION SHIELD	Extruded thermoset semi-conducting polymer over the insulation
SHIELD	Helically applied, annealed, solid bare copper wires

JACKET Cross-linked Polyethylene (XLPE)

JACKET MARKING 00000 FT LS CABLE XXXKCMIL (or AWG) CU 1/C 35KV 100%
INSUL LEVEL 345 MILS TRXLPE
'No. of Neutral' X # 'Neutral size'
XLPE JKT MV-105 (UL)
MADE IN USA MM/DD/YYYY
(LIGHTNING BOLT SYMBOL)

PACKING Non-returnable wood reels

STANDARDS (Compliance)

PERFORMANCE	AEIC CS8 ASTM B3 ASTM B8 ICEA S-94-649 UL 1072
OTHER	OSHA

TR-XLPE/CN/XLPE Power, MV-105 Type Primary UD, 35kV 100% Single Conductor Un-Filled Copper - Silicone Free

SPECIFICATIONS							
Part Number	Conductor Size (AWG/kcmil)	Conductor Diameter (in)	Insulation Diameter (in)	Concentric Neutral (No. x AWG)	Jacket Thickness (in)	Approx. O.D (in)	Approx. Weight (lbs/kft)
U35ATX-4ACB-1CZ-R3Z-Z	4/0 AWG	0.512	1.27	13 x 14 AWG (1/3N)	0.050	1.62	1,520
U35ATX-50CB-1CZ-R3Z-Z	500kcmil	0.789	1.56	28 x 14 AWG (1/3N)	0.075	1.96	2,835
U35ATX-A1CB-1CZ-R3Z-Z	1000kcmil	1.117	1.91	24 x 10 AWG (1/3N)	0.075	2.41	5,150

The dimensions and weights shown are approximate and subject to industry standards. Other designs available upon request.