

EPR/CN/LLDPE, Type Primary UD (Unfilled)


E9HPT-A33F01CA00

DESCRIPTION

The Medium Voltage Primary Underground Distribution (UD) cables consist of an Aluminum (unfilled) conductor, covered with ethylene propylene rubber (EPR), a concentric neutral of helically applied copper wires, and a linear low-density polyethylene (LLDPE) jacket with 3 extruded red stripes.

APPLICATION

- Suitable for underground primary power applications
- For wet or dry locations
- For direct burial or in duct
- Excellent resistance to treeing
- Jacket is sunlight-resistance
- Designed to operate
 - » 105°C for normal operations
 - » 140°C for emergency overload
 - » 250°C for short circuit

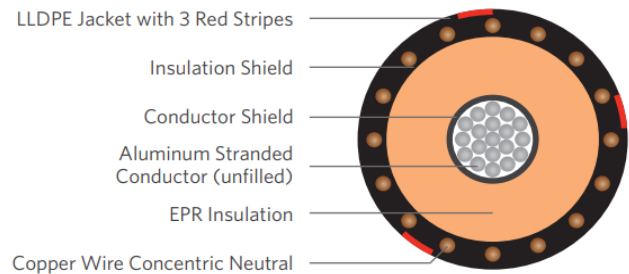

SPECIFICATIONS

Conductor	Aluminum 1350 compressed Lay stranded Class B (unfilled)
Conductor	Extruded thermoset
Strand Shield	Semi-conducting polymer
Insulation	Ethylene Propylene Rubber (EPR)
Neutral	Solid copper wires helically applied
Insulation	Extruded thermoset
Shield	Semi-conducting polymer
Jacket	Linear Low-Density Polyethylene

Packaging	Non-returnable reels
	ASTM B3
	ASTM B-230
	ASTM B-231
Performance Compliance	ICEA S-94-649
	ICEA T-31-610 (water test)
	AEIC CS8
	UL 1072 (MV-90)
	RUS U1

1C 350kcmil 37-wires Aluminum (unfilled), 15kV 100% 175mils EPR, (18-wires copper x 14 AWG) 1/3 reduced concentric neutral, LLDPE jacket

PART NUMBER AND PHYSICAL CHARACTERISTICS

Part Number	Conductor Size (AWG/kcmil)	Conductor Diameter (in.)	Insulation Diameter (in.)	Copper Concentric Neutral	Jacket Thickness (in.)	OD (in.)	Net Weight (lbs./MFT)
E9HPT-A33F01CA00	350	0.648	1.040	18 x 14AWG (1/3RCN)	0.055	1.37	1,056

The dimensions and weights shown are nominal and subject to industry standards. Other designs available upon request.