


**TR-XLPE/CN/LLDPE, Type MV-90, Primary UD, 15kV 133%, 220-MILS  
Single Conductor Filled Aluminum -Silicone Free**

**DESCRIPTION**

This specification covers cables that consist of Aluminum filled conductor, covered with tree-retardant cross-linked polyethylene (TR-XLPE), a concentric neutral of helically applied copper wires, and a moisture blocked linear low density polyethylene (LLDPE) jacket with 3 extruded red stripes.

**APPLICATIONS**

- Suitable for underground primary power applications: direct burial or in duct.
- For wet or dry locations
- Jacket is sunlight resistant, meeting the 720-hr exposure test
- Excellent resistance to treeing
- Designed to operate continuously at a conductor temperature not exceeding
  - 105°C for normal operations
  - 140°C for emergency overload
  - 250°C for short circuit

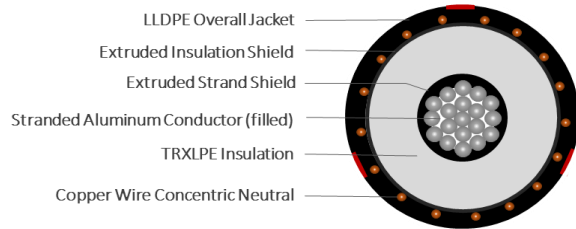

CONSTRUCTION	
<b>CONDUCTOR</b>	1350 Aluminum (filled) Class B Strand Compressed
<b>STRAND SHIELD</b>	Thermoset semi-conducting polymer
<b>INSULATION</b>	Tree-retardant cross-linked polyethylene (TR-XLPE)
<b>INSULATION SHIELD</b>	Thermoset semi-conducting polymer
<b>SHIELD</b>	Helically applied, annealed, solid bare copper wires
<b>JACKET</b>	Moisture blocked Linear low-density polyethylene (LLDPE)
<b>PACKAGING</b>	Non-returnable wooden reels

STANDARDS (Compliance)	
<b>PERFORMANCE</b>	AEIC CS8
	ASTM B-3
	ASTM B-230
	ASTM B-231
	ICEA S-94-649
	ICEA-T-34-664
	ICEA-T-31-610
	UL 1072

SPECIFICATIONS							
Part Number	Conductor Size	Conductor Diameter (in)	Insulation Diameter (in)	Metallic Shield	Jacket Thickness (in)	Approx. Overall Diameter (in)	Approx. Net Weight (lbs/kft)
E9JKT-A36F01CA20	350 kcmil	0.661	1.13	18 x 14 AWG (1/3N)	0.055	1.47	1,109

\*The dimensions and weights shown are nominal and subject to industry standards. Other designs available upon request.