


**EPR/CN/LLDPE, Type MV-90, Primary UD, 15kV 133%, 220-MILS  
Single Conductor Un-Filled Aluminum -Silicone Free**

**DESCRIPTION**

This specification covers cables that consist of Aluminum un-filled conductor, covered with ethylene propylene rubber (EPR), a concentric neutral of helically applied copper wires, and a linear low density polyethylene (LLDPE) jacket with 3 extruded red stripes.

**APPLICATIONS**

- Primary installations include cable trays, outdoor locations, in conduit, duct, free air and raceways.
- Direct buried if installed in a system with a ground conductor that is in close proximity and conforms to NEC 250.4(A)(5)
- In wet or dry locations.
- Approved for Class I, Div. 2 industrial hazardous locations per NEC
- For CT use for 1/0 AWG and larger
- Designed to operate continuously at a conductor temperature not exceeding
  - 105°C for normal operations
  - 140°C for emergency overload
  - 250°C for short circuit

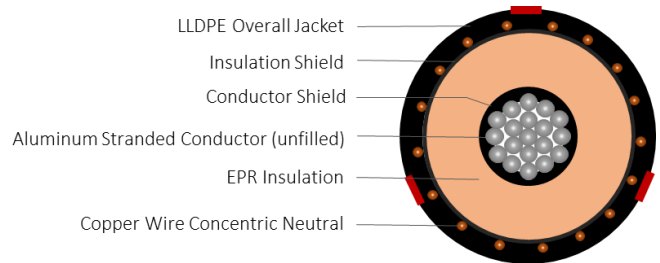

CONSTRUCTION		STANDARDS (Compliance)	
<b>CONDUCTOR</b>	1350 Aluminum (unfilled) Class B Strand Compact	<b>PERFORMANCE</b>	AEIC CS8 ASTM B-3 ASTM B-230 ASTM B-400 ICEA S-94-649 UL 1072
<b>STRAND SHIELD</b>	Thermoset semi-conducting polymer		
<b>INSULATION</b>	Ethylene propylene rubber (EPR)		
<b>INSULATION SHIELD</b>	Thermoset semi-conducting polymer		
<b>SHIELD</b>	Helically applied, annealed, solid bare copper wires		
<b>JACKET</b>	Linear low-density polyethylene (LLDPE)		
<b>PACKAGING</b>	Non-returnable wooden reels		

SPECIFICATIONS							
Part Number	Conductor Size	Conductor Diameter (in)	Insulation Diameter (in)	Metallic Shield	Jacket Thickness (in)	Approx. Overall Diameter (in)	Approx. Net Weight (lbs/kft)
E9JPT-B23T01CA00	750 kcmil	0.908	1.40	24 x 12 AWG (1/3N)	0.080	1.82	2,045

\*The dimensions and weights shown are nominal and subject to industry standards. Other designs available upon request.