

EPR/CN/LLDPE, Type Primary UD (Unfilled)


Part Number: E9LPT-A31B01CA00

DESCRIPTION

The Medium Voltage Primary Underground Distribution (UD) cables consist of a Copper stranded unfilled conductor, covered with Ethylene Propylene Rubber (EPR), a concentric neutral of helically applied copper wires, and a linear low-density polyethylene (LLDPE) jacket with 3 extruded red stripes.

APPLICATION

- Suitable for underground primary power applications
- For wet or dry locations
- For direct burial or in duct
- Excellent resistance to treeing
- Jacket is sunlight-resistance
- Designed to operate
 - » 105°C for normal operations
 - » 140°C for emergency overload
 - » 250°C for short circuit

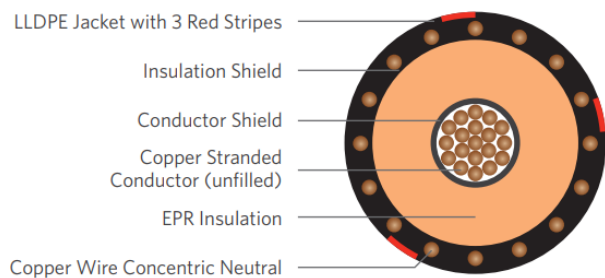

SPECIFICATIONS

Conductor	Fully annealed bare copper Class B compressed strand (unfilled)
Conductor Strand Shield	Extruded thermoset Semi-conducting polymer
Insulation	Ethylene Propylene Rubber (EPR)
Neutral	Solid copper wires
Jacket	Linear Low-Density Polyethylene

Packaging	Non-returnable reels
Performance	ASTM B-3
Compliance	ASTM B-230 ASTM B-231 ICEA S-94-649 AEIC CS8 UL 1072 (MV-90) RUS U1

1C 350kcmil 37-wires Copper (unfilled), 25kV 133% 320mils EPR, (29-wires copper x 14AWG) 1/3 reduced concentric neutral, LLDPE jacket

PART NUMBER AND PHYSICAL CHARACTERISTICS							
Part Number	Conductor Size (AWG/kcmil)	Conductor Diameter (in.)	Insulation Thickness (in.)	Copper Concentric Neutral	Jacket Thickness (in.)	OD (in.)	Net Weight (lbs./MFT)
E9LPT-A31B01CA00	350	0.648	1.332	29 x 14AWG	0.055	1.71	2,309

The dimensions and weights shown are nominal and subject to industry standards.