

EPR/CN/LLDPE, Type MV-90, Primary UD, 15kV 133%, 220-MILS


Single Conductor Filled Copper - Silicone Free

DESCRIPTION

This specification covers cables that consist of Copper filled conductor, covered with ethylene propylene rubber (EPR), a concentric neutral of helically applied copper wires, and a moisture blocked linear low density polyethylene (LLDPE) jacket with 3 extruded red stripes.

APPLICATIONS

- Suitable for underground primary power applications: direct burial or in duct.
- For wet or dry locations.
- Jacket is sunlight resistant.
- Excellent resistance to treeing.
- Designed to operate continuously at a conductor temperature not exceeding
 - >> 105°C for normal operations
 - >> 140°C for emergency overload
 - >> 250°C for short circuit

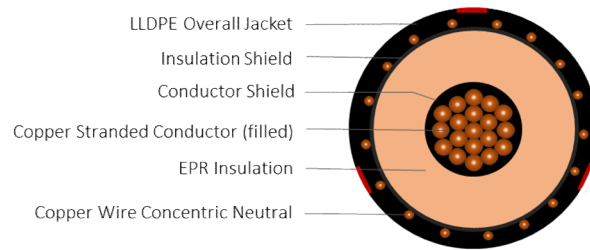

CONSTRUCTION		STANDARDS (Compliance)	
CONDUCTOR	Annealed bare copper (filled) Class B Strand Compressed	PERFORMANCE	AEIC CS8 ASTM B3 ASTM B8 ICEA S-94-649 ICEA-T-34-664 UL 1072
STRAND SHIELD	Thermoset semi-conducting polymer		
INSULATION	Ethylene propylene rubber (EPR)		
INSULATION SHIELD	Thermoset semi-conducting polymer		
SHIELD	Helically applied, annealed, solid bare copper wires		
JACKET	Moisture blocked Linear low-density polyethylene (LLDPE)		
PACKAGING	Non-returnable wooden reels		

SPECIFICATIONS							
Part Number	Conductor Size	Conductor Diameter (in)	Insulation Diameter (in)	Metallic Shield	Jacket Thickness (in)	Approx. Overall Diameter (in)	Approx. Net Weight (lbs/kft)
U15BEL-50DB-1CZ-R3T-M	500 kcmil	0.789	1.30	17 x 10 AWG (1/3N)	0.075	1.78	2,885

*The dimensions and weights shown are approximate and subject to industry standards. Other designs available upon request.